

(21) Application No 9219019.8

(22) Date of filing 08.09.1992

(30) Priority data

(31) 03235882 (32) 17.09.1991 (33) JP
 03235883 17.09.1991
 03341310 24.12.1991

(71) Applicant
Casio Computer Co. Ltd

(Incorporated in Japan)

6-1 2-chome, Nishi-Shinjuku, Shinjuku-ku, Tokyo,
 Japan

(72) Inventors

Satoshi Kinoshita
Sadao Nagashima
Tooru Yamada

(74) Agent and/or Address for Service

A A Thornton & Co
Northumberland House, 303-306 High Holborn,
London, WC1V 7LE, United Kingdom

(51) INT CL⁵

A61B 5/00 5/04

(52) UK CL (Edition L)

G1N NEAX N19B2P N19X5 N30P1 N30P2 N30P6
N30R

(56) Documents cited

EP 0472411 A1 WO 90/09143 A1 US 5036869 A
US 4958645 A US 4854328 A US 3902478 A

(58) Field of search

UK CL (Edition K) G1N NEAA NESS
INT CL⁵ A61B

(54) Biological signal monitor and transmitter

(57) Biological signals detected by detecting units (1) on a plurality of persons to be monitored are first transmitted to wristwatches (3). The biological signals and ID code data are then transmitted in the form of radio signals to a receiver (6) which sends them to a monitor (8). The monitor (8) displays the biological signals in a one-to-one correspondence with the ID code data. Upon detecting an abnormality, the monitor (8) generates an alarm sound. The corresponding person may stop any erroneous alarm sound by manipulating a switch. If it is not a false alarm, the person's wristwatch (3) transmits a contact designation signal and ID code data to the receiver (6) which then activates an auto-dialing unit to inform the third person of the emergency.

FIG.1

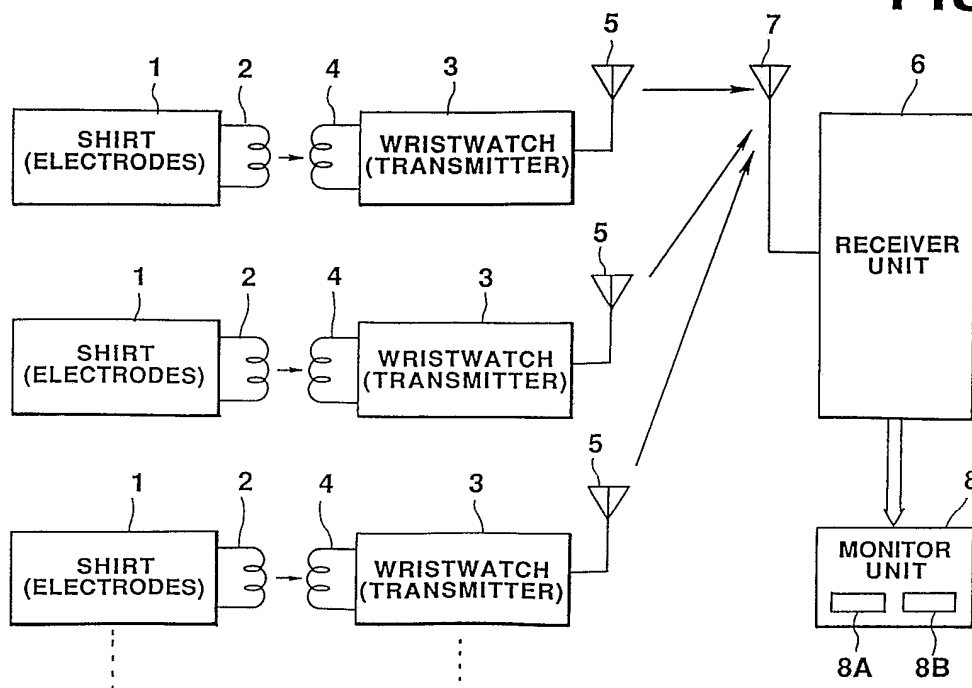
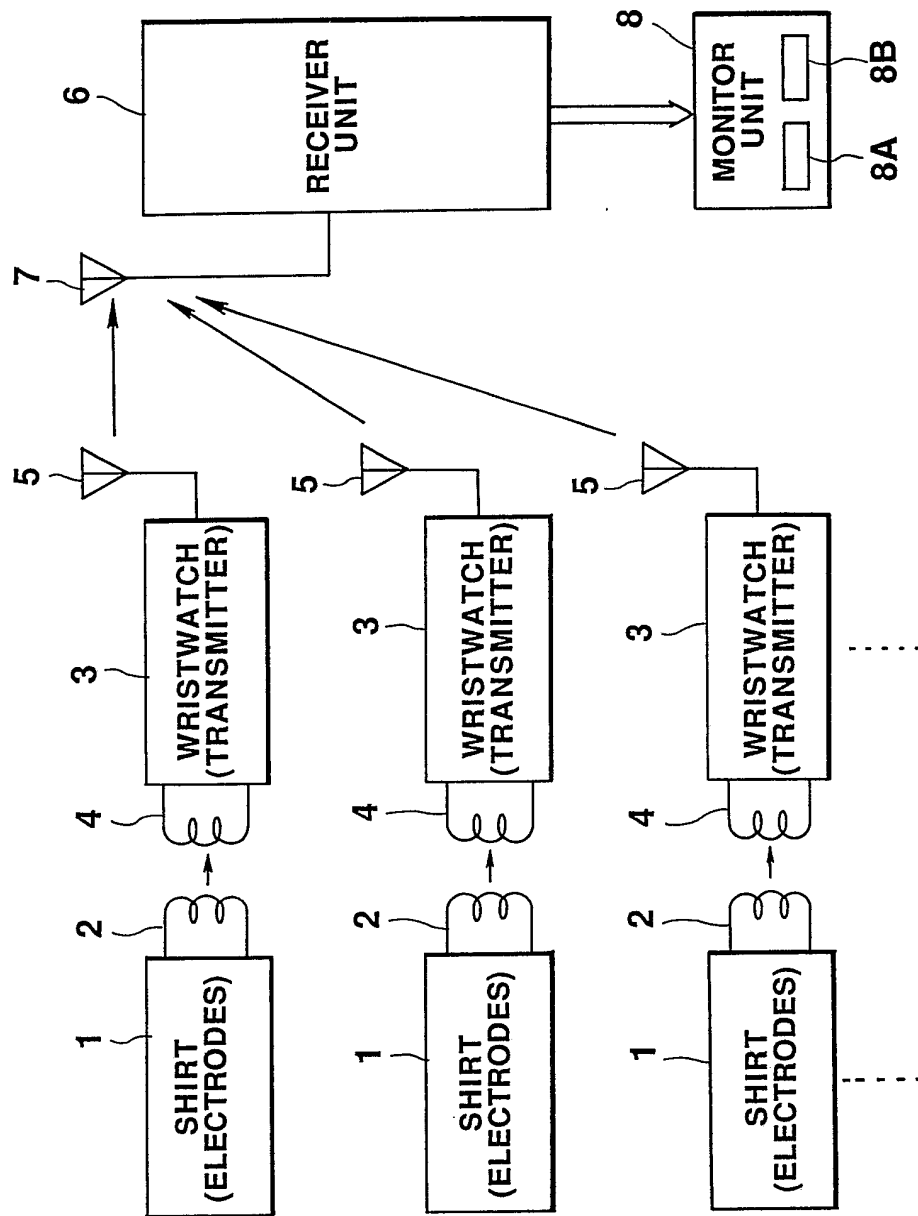
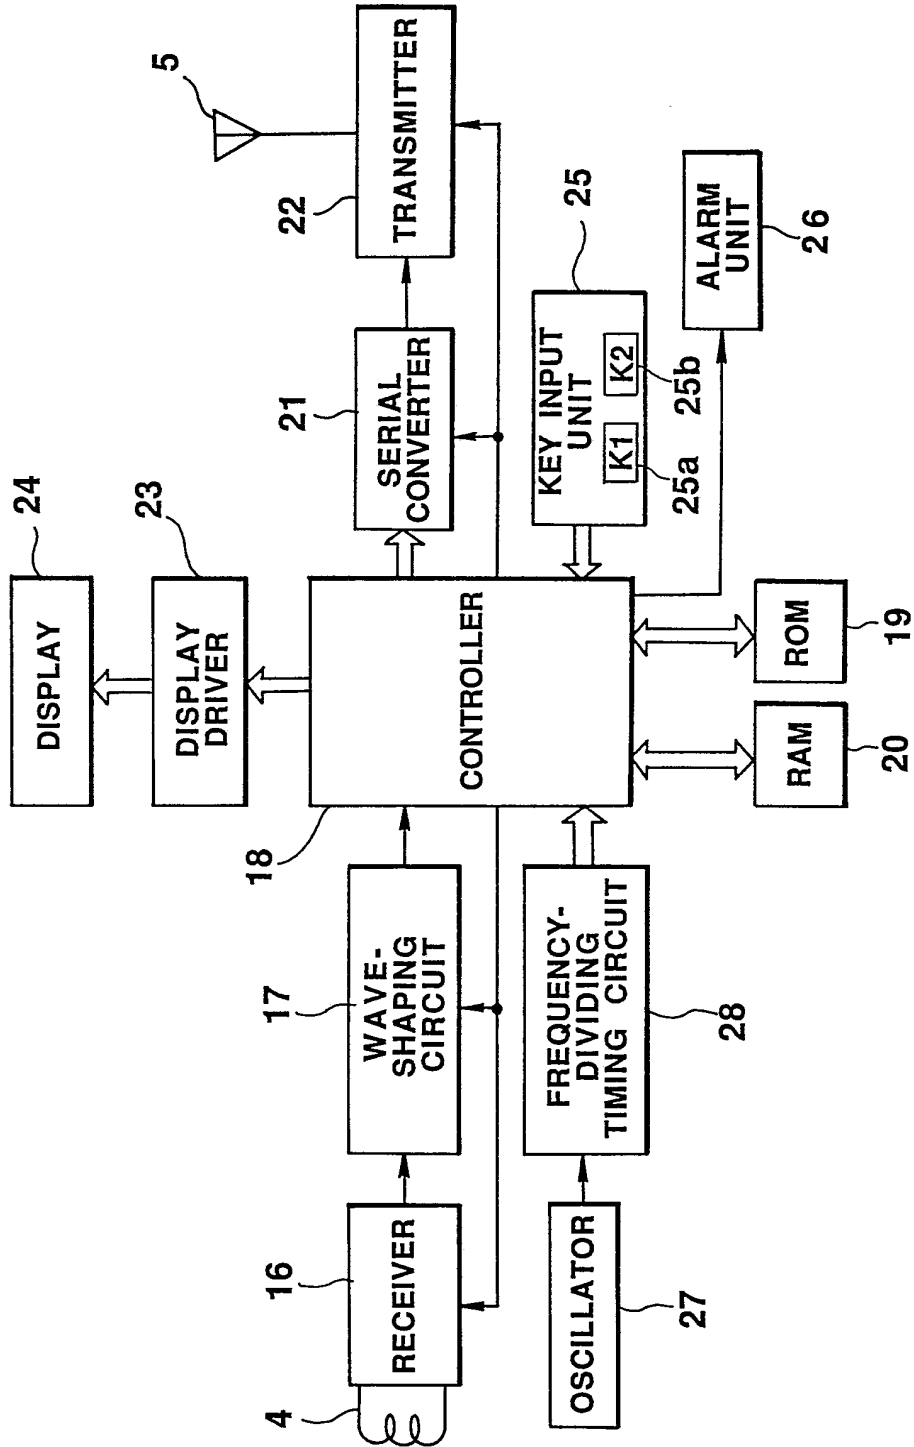


FIG.1



2/16

FIG. 4



3/14

FIG. 2

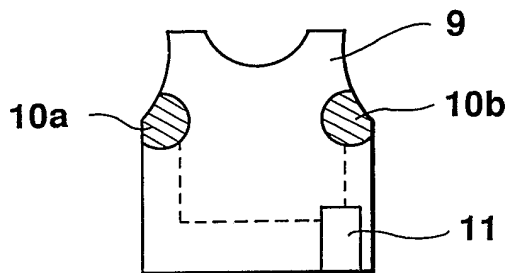
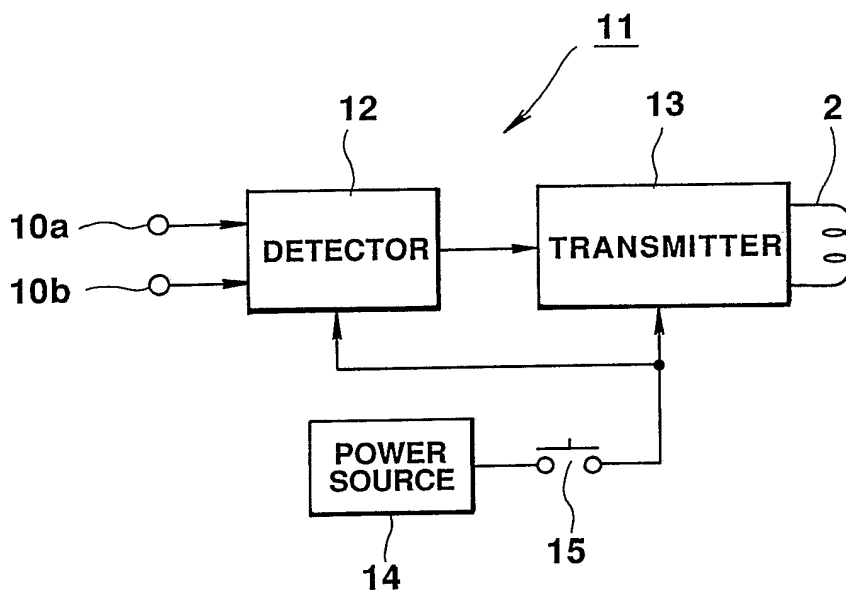


FIG. 3



4/16

FIG. 5

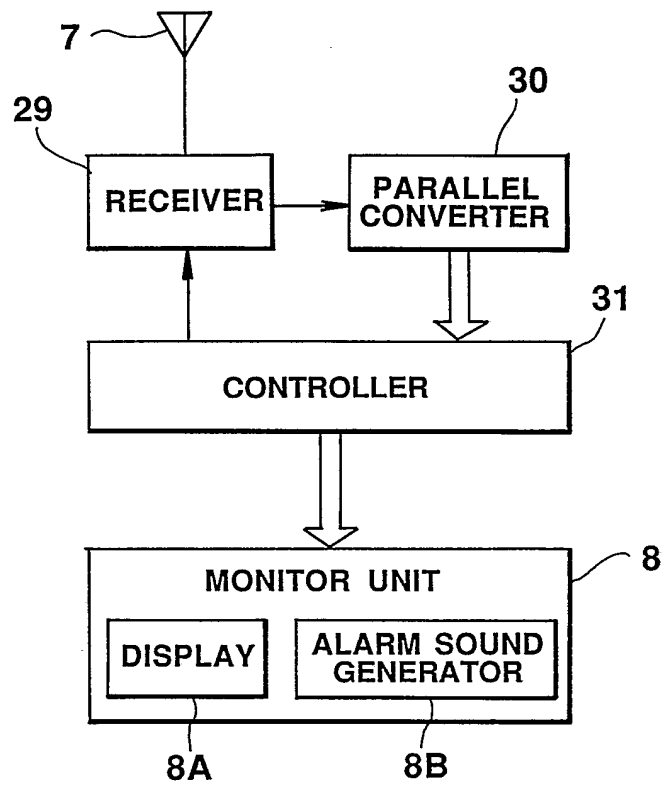
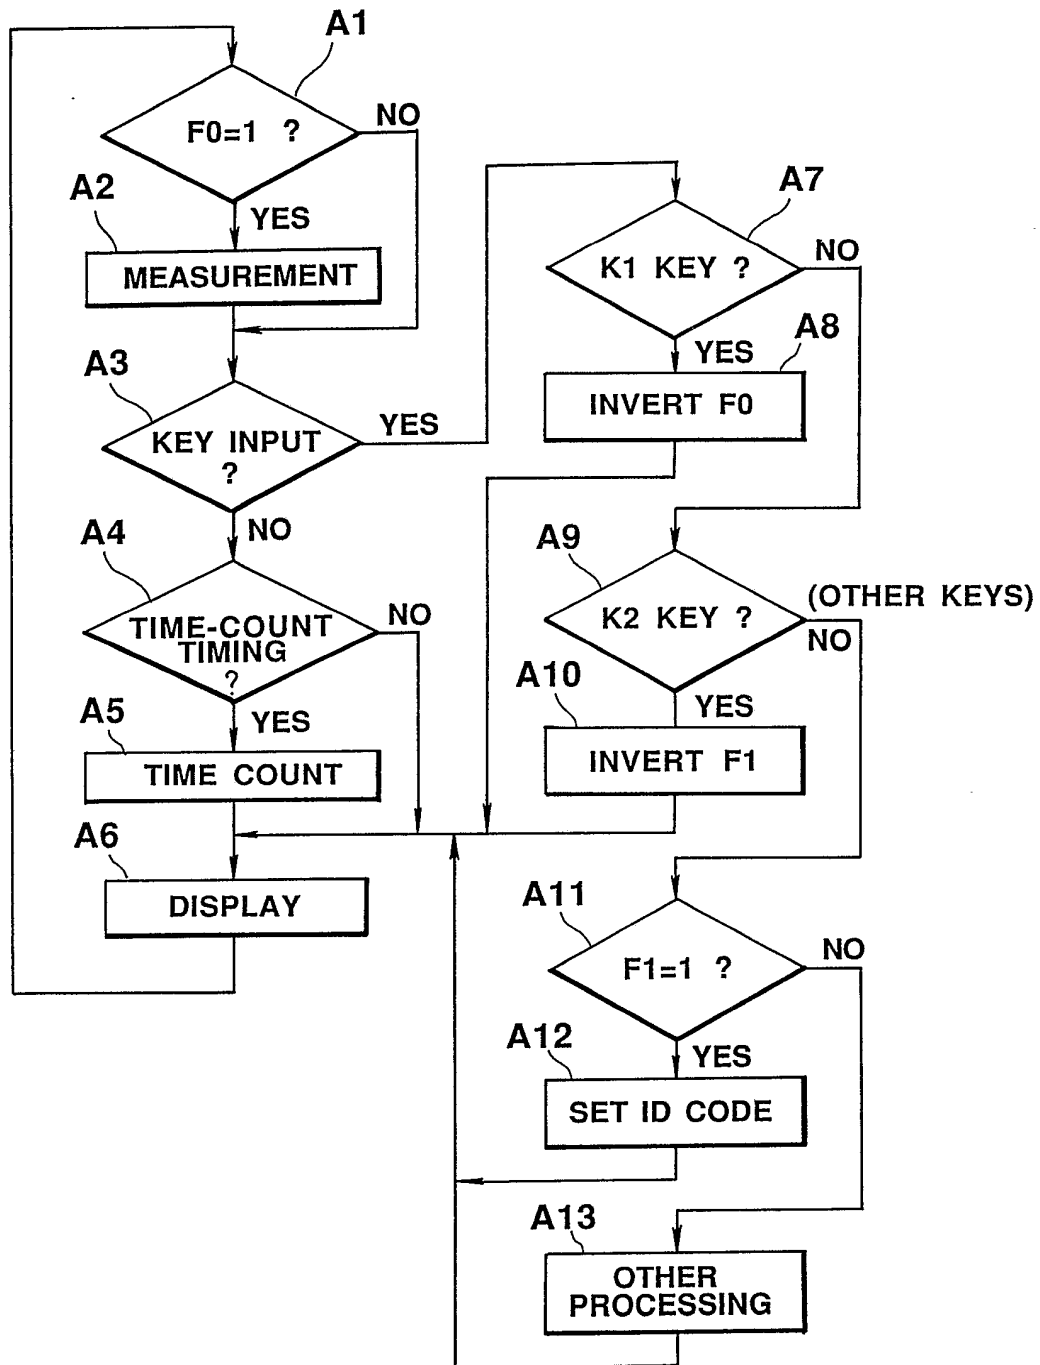


FIG. 6

DISPLAY REGISTER		
TIME-COUNT REGISTER		
F0	F1	ID CODE
T		

5/16

FIG. 7



6/14

FIG. 8

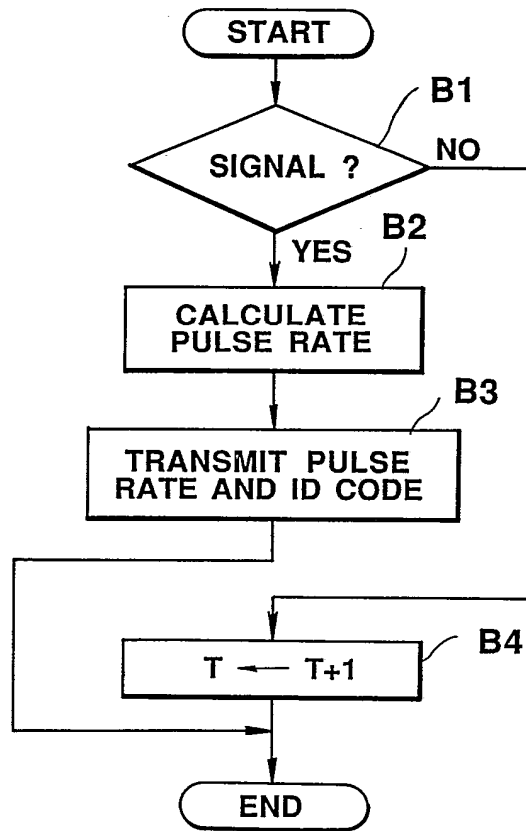


FIG. 9A




FIG. 9B


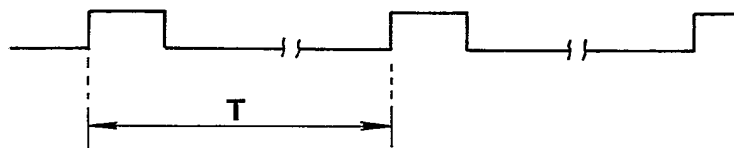


FIG. 9C



7/14

FIG.10

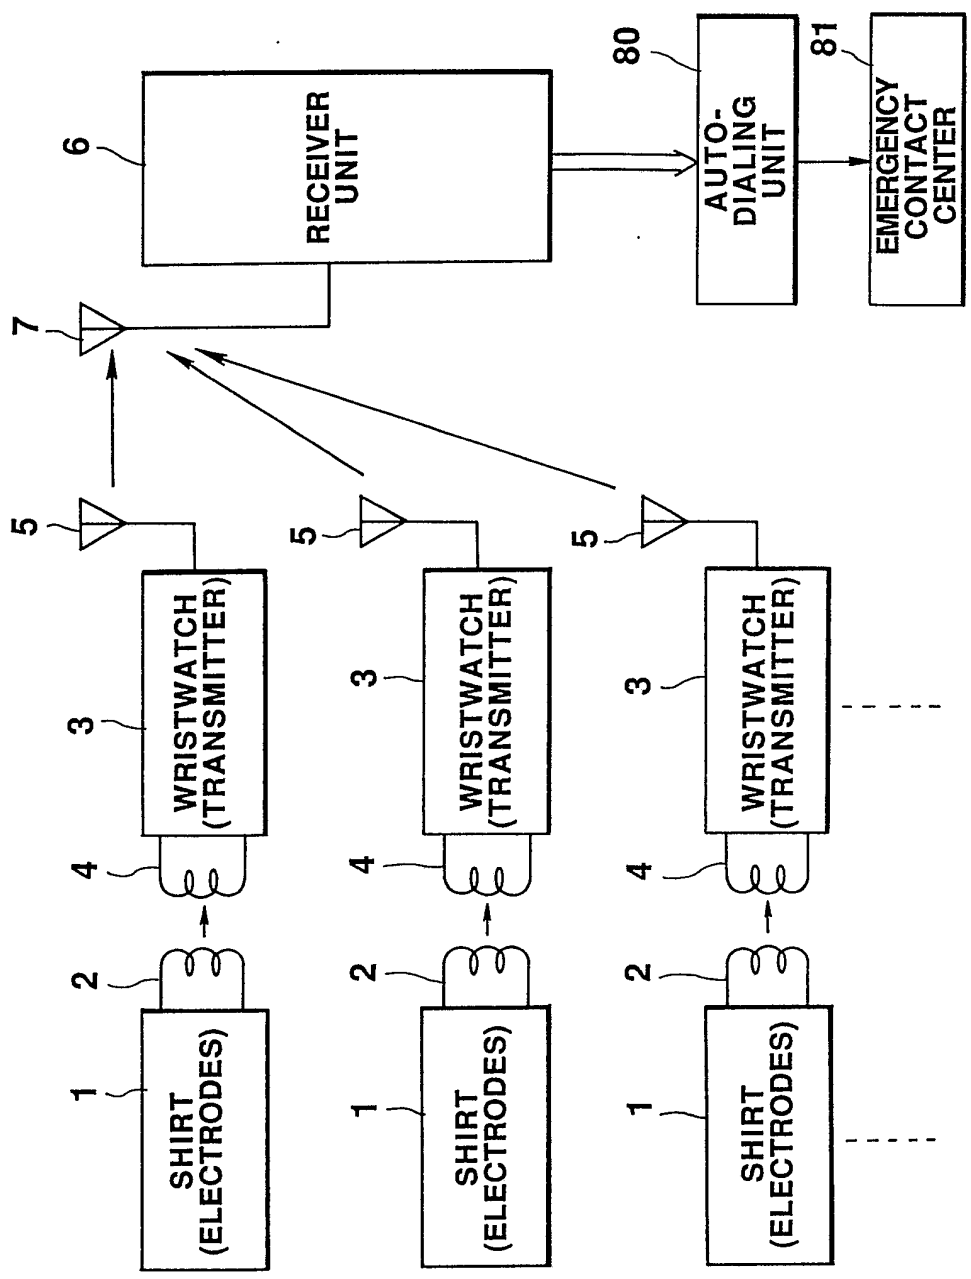
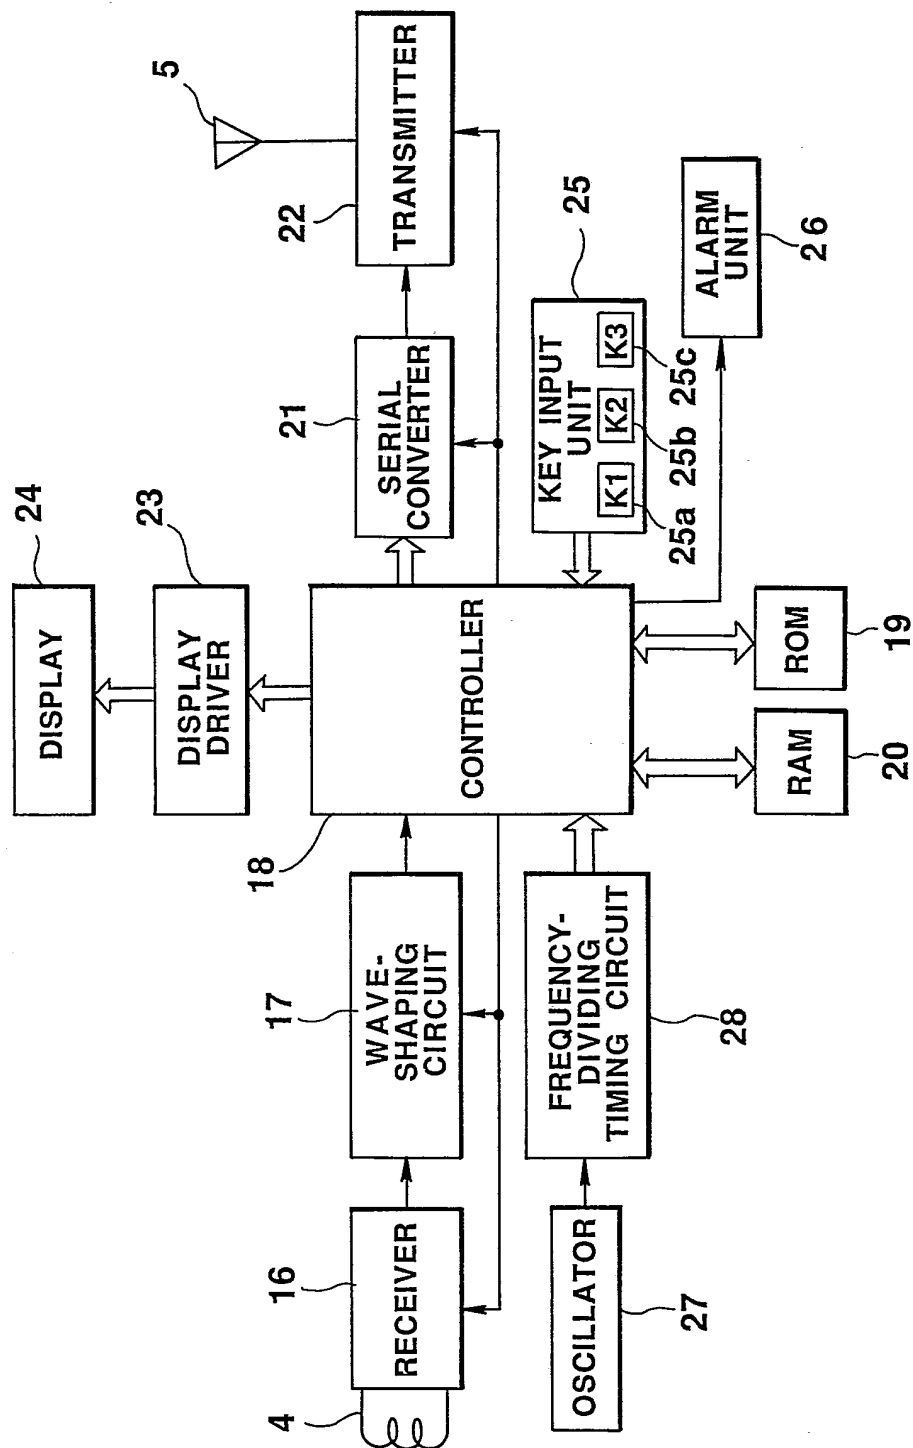


FIG.11



8/16

9/14

FIG.12

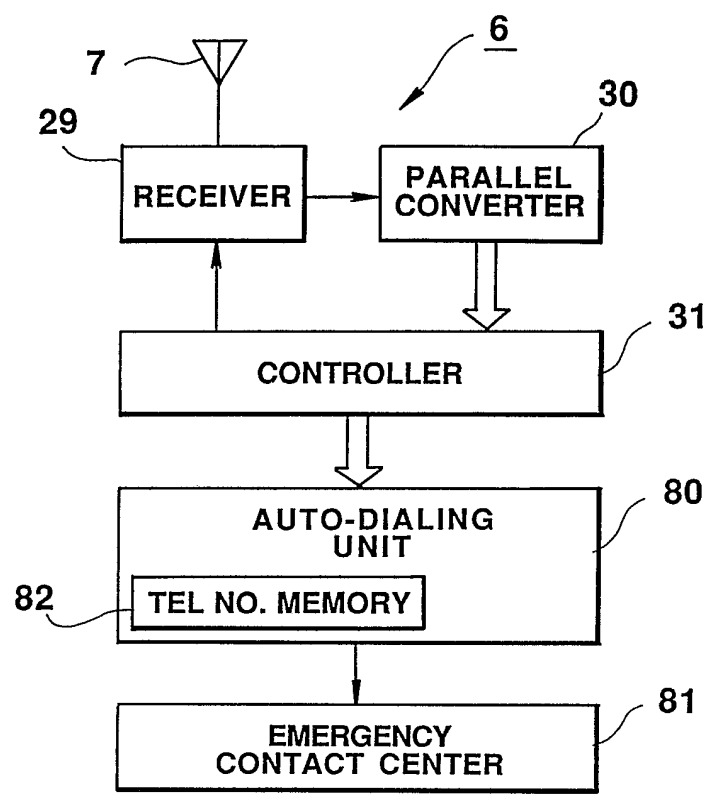


FIG.13

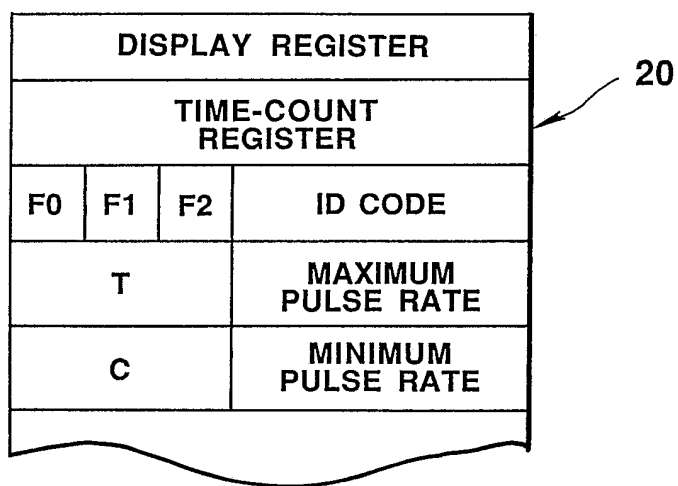


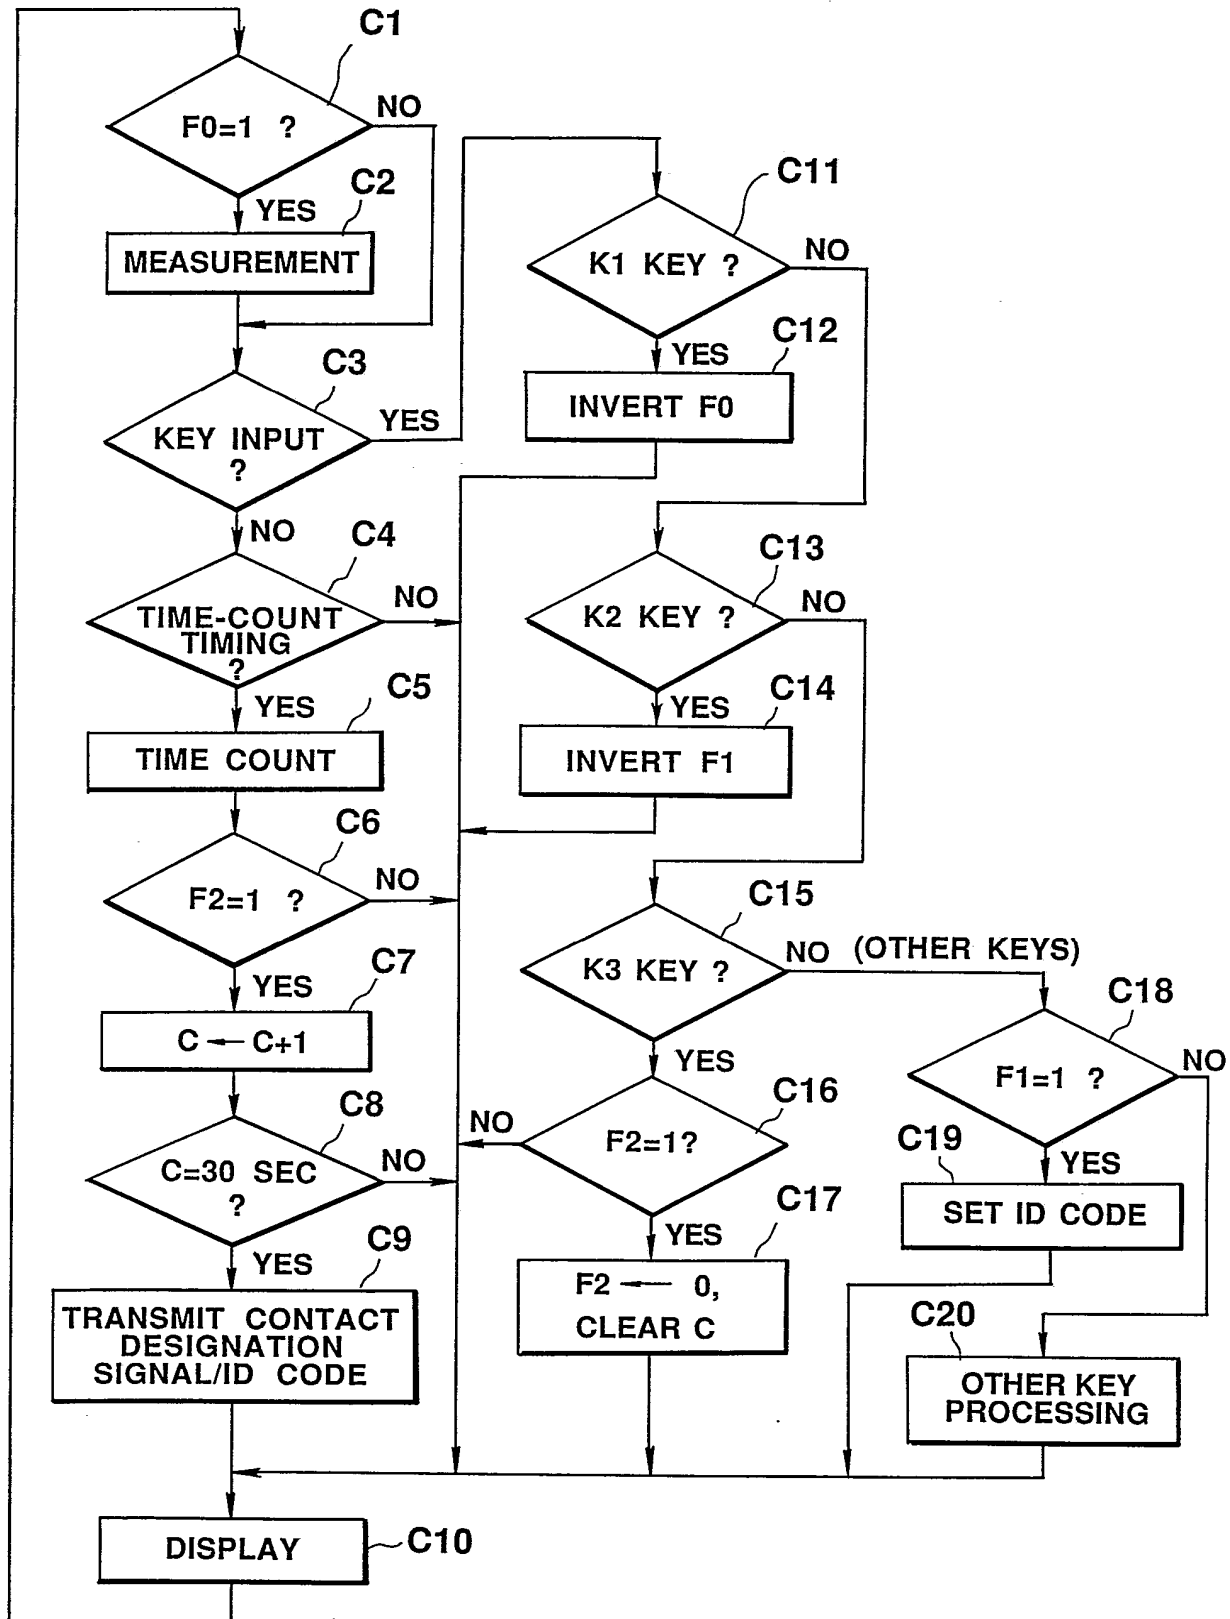
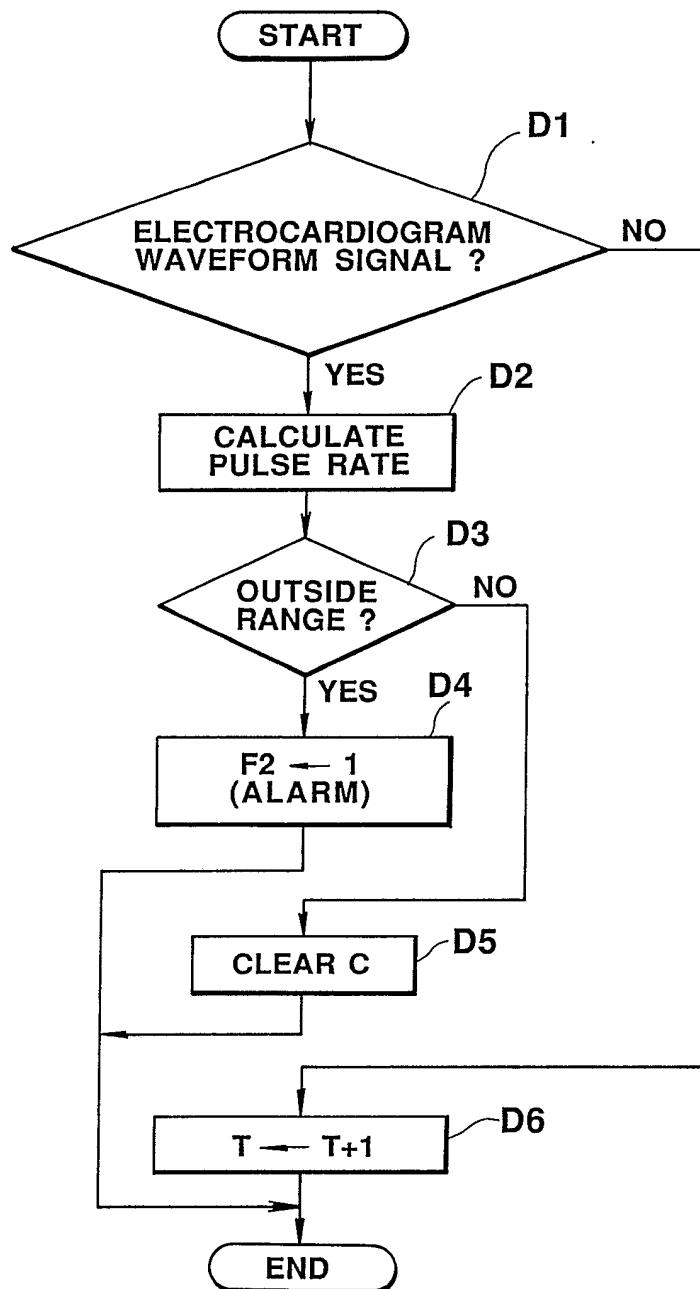
FIG. 14

FIG. 15

12/
14

FIG. 16

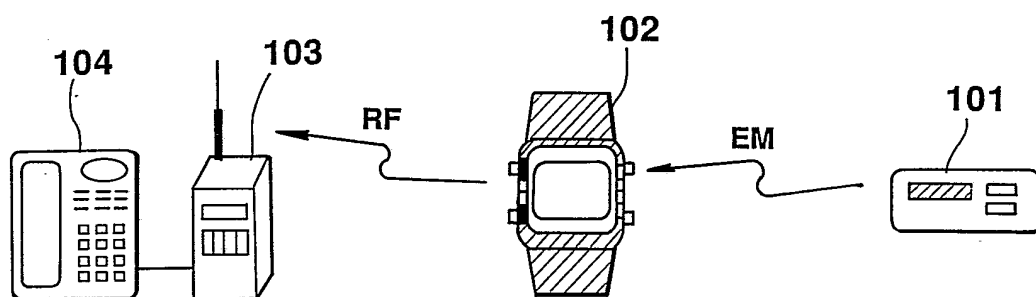
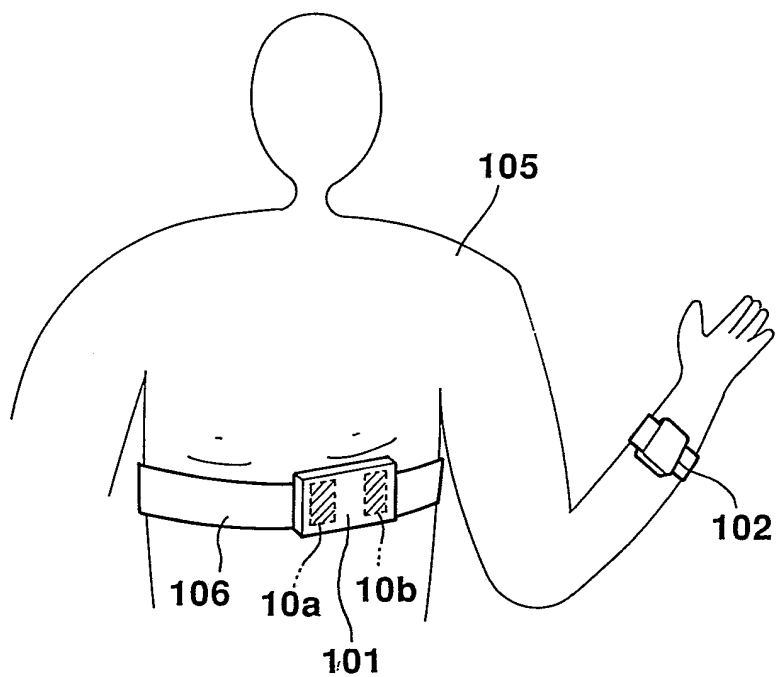


FIG. 17



13/14

FIG. 18

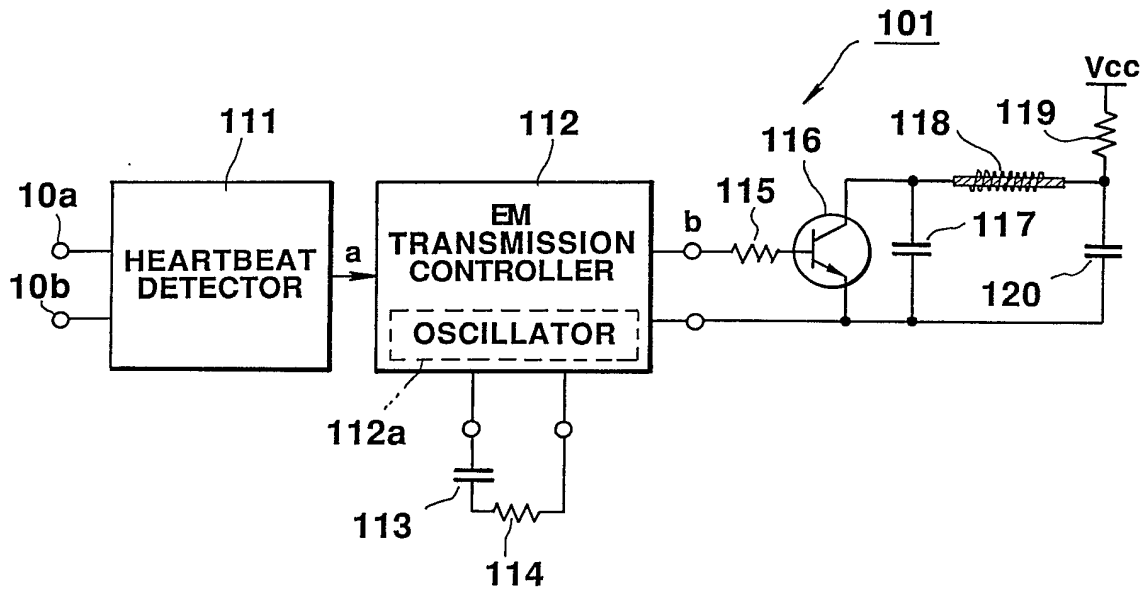
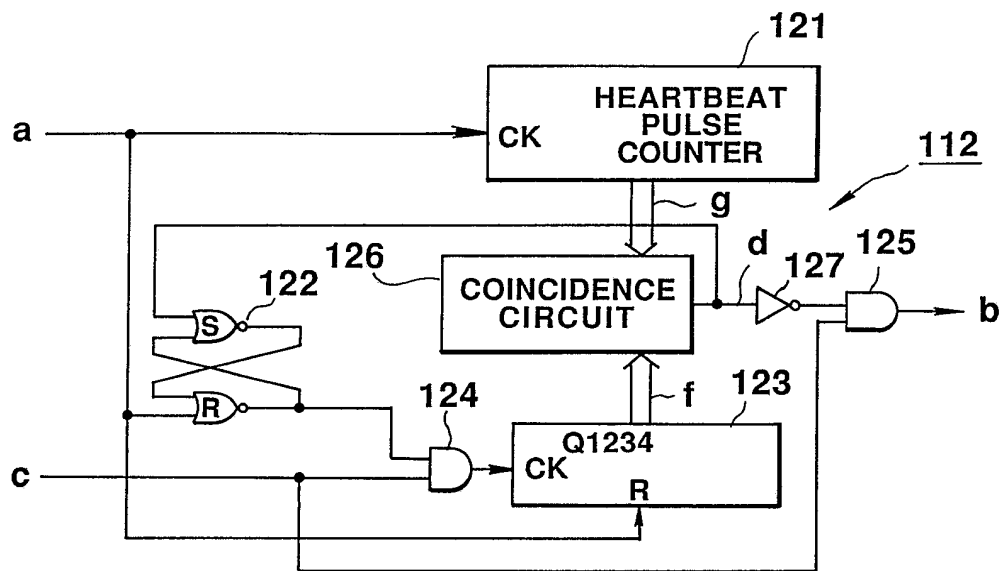


FIG. 19



14/14

FIG. 20

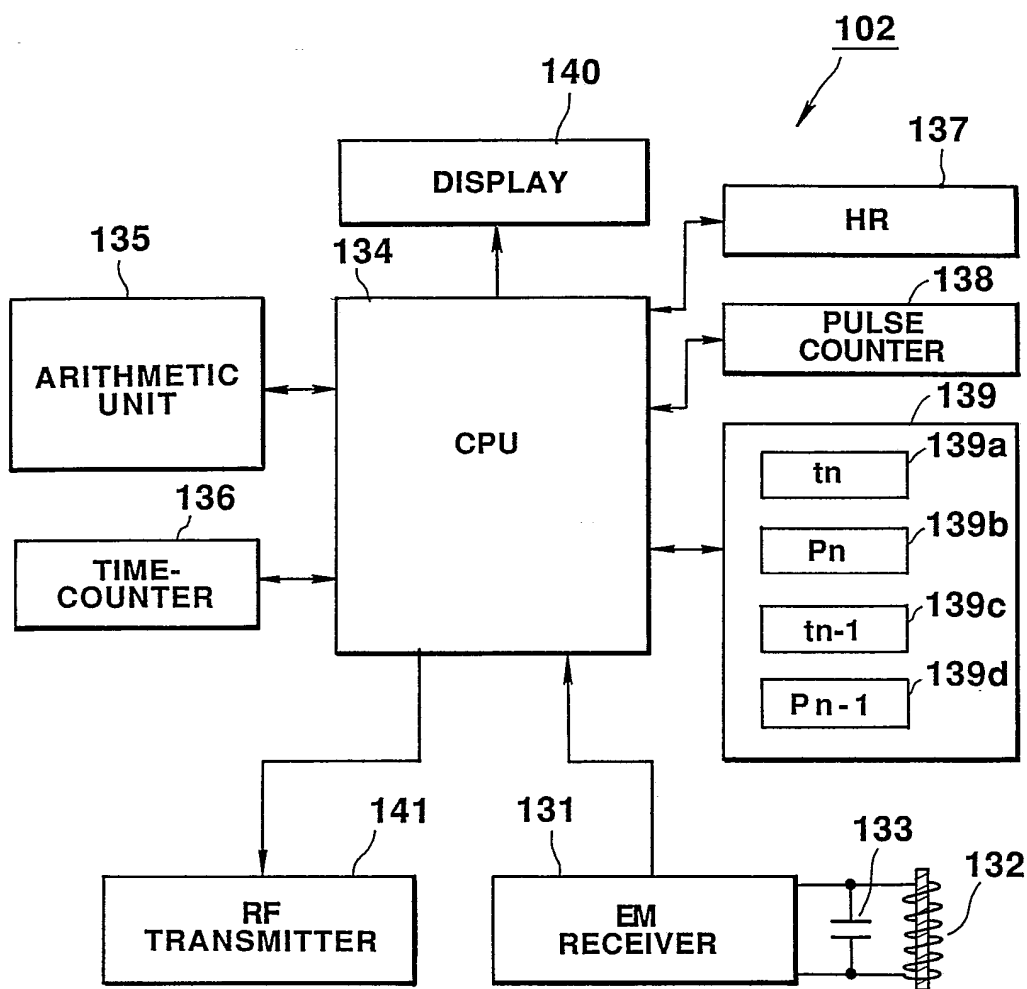
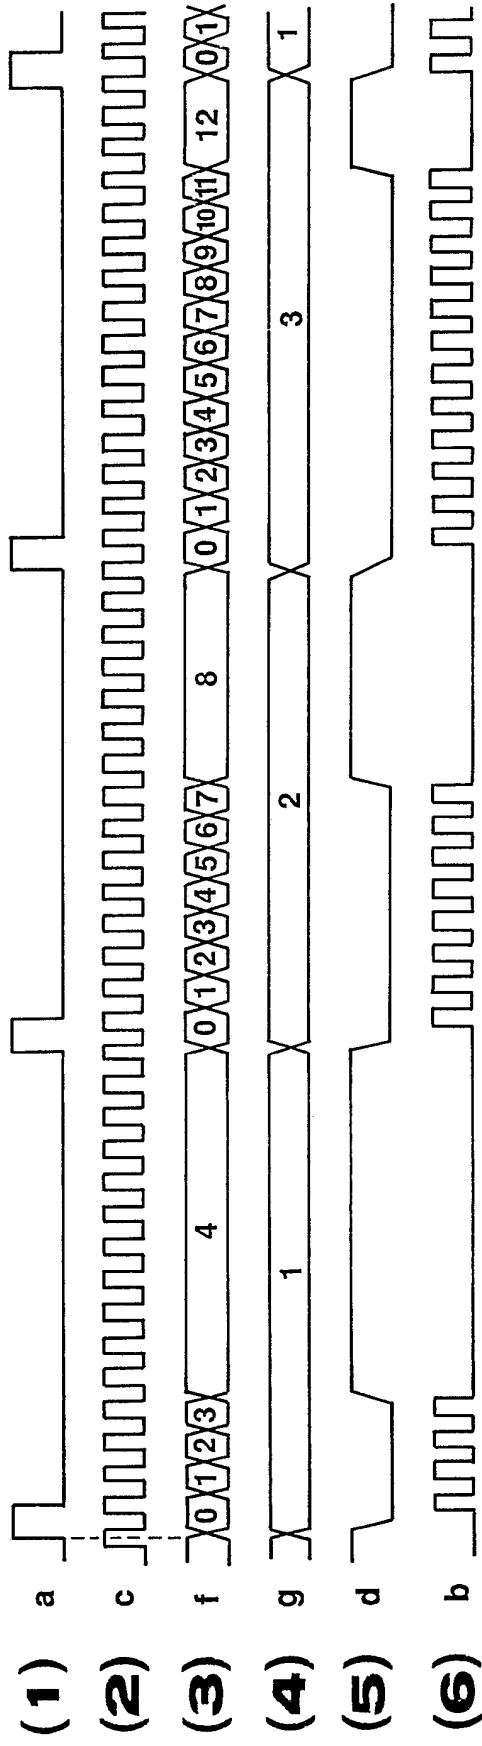
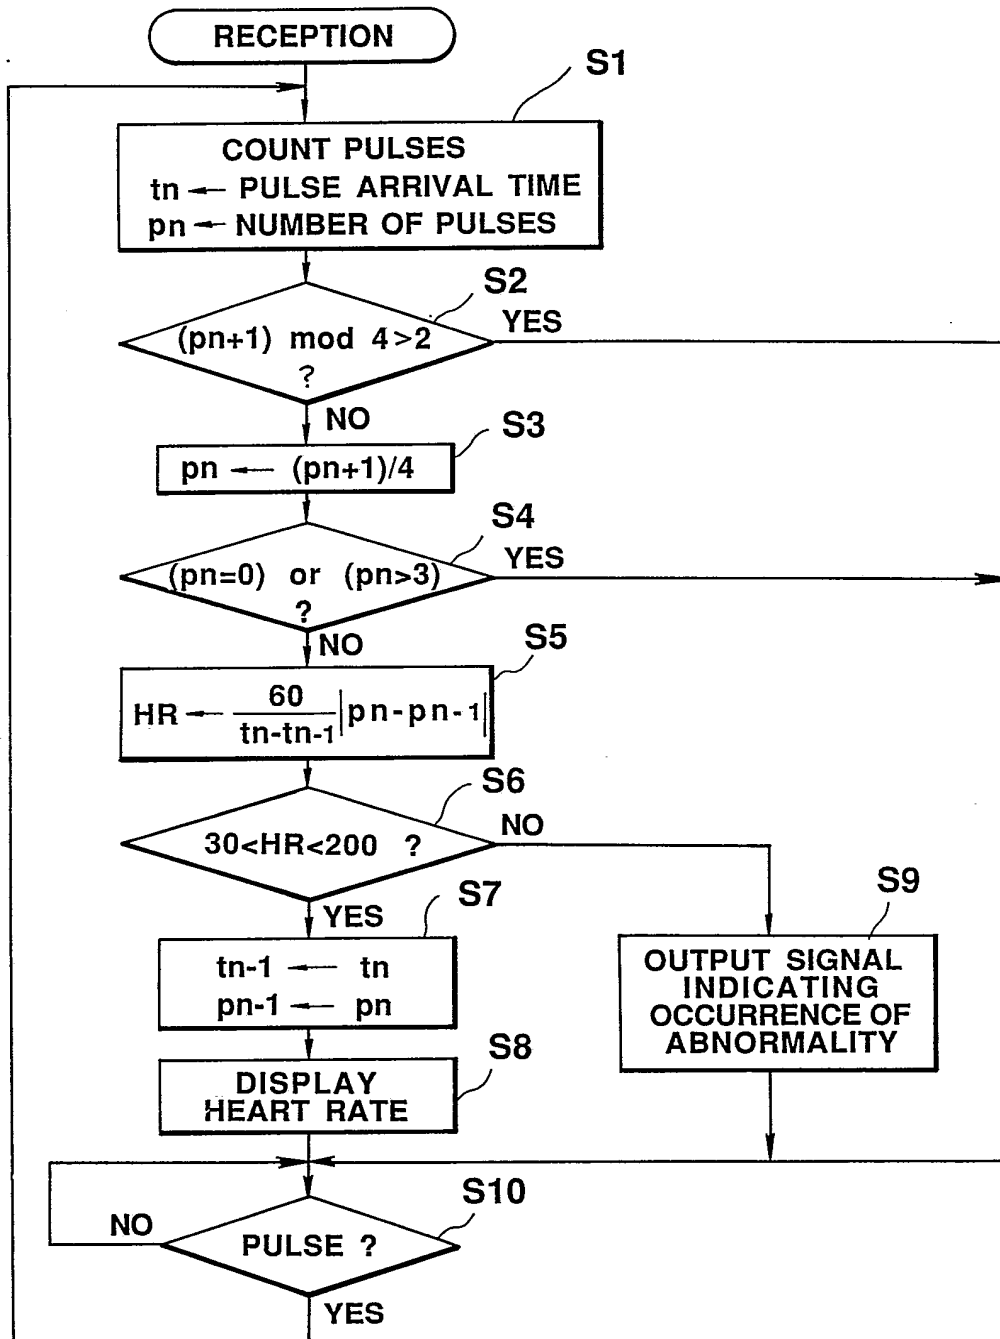


FIG. 21



116/116

FIG. 22



"MONITOR SYSTEM AND BIOLOGICAL SIGNAL
TRANSMITTER THEREFOR"

The present invention relates to a monitor system capable of monitoring signals or information (to be referred to as biological signals or biological information hereinafter) indicating conditions of a living body, such as an electrocardiogram waveform, a heart rate, and a blood pressure, of a person (object) to be monitored, e.g., a patient, and a biological signal transmitter used in this system.

For patients who take exercises for rehabilitation or who get therapeutic exercises, it is necessary to monitor a biological signal or biological information, such as a heart rate, a pulse rate, or a blood pressure, during the exercises in order to exercise effectively and safely. This is also required for athletes who take hard exercises or people who get exercises for the purpose of promotion of health or physical fitness.

An ergometer is conventionally known as a device for this purpose. That is, a pulse rate sensor is put on an earlobe of a person to be monitored, and a change in a bloodstream or the like sensed by the pulse rate sensor is optically detected, thereby monitoring the pulse rate of the person during a so-called "aerobike" exercise. The ergometer thus evaluates the load of exercise on the person to be monitored or evaluates his or her physical strength.

This conventional ergometer, however, is generally so manufactured that a person to be monitored himself or herself monitors his or her own load of exercise or physical strength. Therefore, it is impossible for the
5 third person, such as a doctor or a trainer, to simultaneously or individually monitor heart rates, blood pressures, or the like of a large number of persons to be monitored.

The present invention has been made to solve the
10 above conventional problems.

It is, therefore, an object of the present invention to provide a monitor system capable of monitoring a biological signal or biological information, such as an electrocardiogram waveform, a heart rate, or a blood
15 pressure, of a person to be monitored, and a biological signal transmitter used in this system.

It is another object of the present invention to provide a monitor system capable of simultaneously or individually monitoring pieces of biological information, such as pulse rates, of a plurality of persons
20 to be monitored.

It is still another object of the present invention to provide a monitor system capable of simultaneously monitoring pieces of biological information, such as
25 pulse rates, of a plurality of persons to be monitored, and upon detecting occurrence of an abnormality in a given person to be monitored, automatically making

contact with an emergency contact center or the like by phone, thereby informing the center of the state of emergency of the person having the abnormality.

It is still another object of the present invention
5 to provide a monitor system capable of detecting biological information, such as a pulse rate, of a person to be monitored, and reliably informing the third person of the detected biological information without errors.

In order to achieve the above objects, the present
10 invention adopts the following arrangements.

That is, one arrangement of the present invention comprises a plurality of biological signal detecting means, to be put on a plurality of human bodies, for individually detecting biological signals generated by
15 the human bodies, a plurality of first transmitting means each for transmitting the biological signal detected by a corresponding one of the biological signal detecting means, a plurality of second transmitting means each for receiving the biological signal
20 transmitted from a corresponding one of the first transmitting means and transmitting an ID code signal predetermined in correspondence with the received biological signal together with the biological signal in the form of a radio signal, and monitor means for receiving
25 the radio signal transmitted from the plurality of second transmitting means and monitoring pieces of biological information corresponding to the biological

signals transmitted in the form of radio signals in a one-to-one correspondence with the ID code signals.

Another arrangement of the present invention is a biological signal transmitter, to be put on a human
5 body, for receiving an input biological signal from output means for detecting a biological signal generated by the human body and outputting the detected biological signal, and transmitting the received biological signal in the form of a radio signal to monitor means for monitoring the content of the biological signal, the biological signal transmitter comprising receiving means for
10 receiving the input biological signal from the output means, and transmitting means for transmitting the biological signal received by the receiving means together with an ID code signal predetermined in
15 correspondence with the received biological signal in the form of a radio signal to the monitor means.

Still another arrangement of the present invention comprises a plurality of biological signal detecting
20 means, to be put on a plurality of human bodies, for individually detecting biological signals generated by the human bodies, a plurality of first transmitting means each for transmitting the biological signal detected by a corresponding one of the biological signal
25 detecting means, a plurality of second transmitting means each for receiving the biological signal transmitted from a corresponding one of the first

transmitting means, determining whether a value of the received biological signal is an abnormal value, and if an abnormality is detected, transmitting the biological signal having the abnormality together with an ID code
5 signal predetermined in correspondence with the received biological signal in the form of a radio signal, and monitor means for receiving the radio signal transmitted from the plurality of second transmitting means and monitoring pieces of biological information correspond-
10 ing to the biological signals transmitted in the form of radio signals in a one-to-one correspondence with the ID code signals.

Still another arrangement of the present invention is a biological signal transmitter, to be put on a human
15 body, for receiving an input biological signal from output means for detecting a biological signal generated by the human body and outputting the detected biological signal, and transmitting the received biological signal in the form of a radio signal to monitor means for monitoring the content of the biological signal, the biological
20 signal transmitter comprising receiving means for receiving the input biological signal from the output means, abnormality determining means for determining whether a value of the biological signal received by the
25 receiving means is an abnormal value, and transmitting means for transmitting, if an abnormality is determined by the abnormality determining means, the biological

signal having the abnormality together with an ID code signal predetermined in correspondence with the received biological signal in the form of a radio signal to the monitor means.

5 Still another arrangement of the present invention comprises biological signal detecting means to be put on a human body to sequentially detect biological signals generated by the human body, first transmitting means for patterning the biological signals, sequentially
10 detected by the biological signal detecting means, in accordance with a predetermined rule and sequentially transmitting the patterned biological signals in the form of radio signals, determining means for determining whether the biological signals sequentially transmitted
15 in the form of radio signals from the transmitting means are biological signals patterned in accordance with the rule, calculating means for calculating a value of biological information corresponding to the patterned biological signals if the determining means determines
20 that the biological signals sequentially transmitted from the transmitting means are the biological signals patterned in accordance with the rule, and display means for displaying the value of the biological information calculated by the calculating means.

25 Still another arrangement of the present invention comprises biological signal detecting means to be put on a human body to sequentially detect biological signals

generated by the human body, first transmitting means
for patterning the biological signals, sequentially
detected by the biological signal detecting means, in
accordance with a predetermined rule and sequentially
5 transmitting the patterned biological signals in the
form of radio signals, determining means for determining
whether the biological signals sequentially transmitted
in the form of radio signals from the transmitting means
are biological signals patterned in accordance with the
10 rule, calculating means for calculating a value of
biological information corresponding to the patterned
biological signals if the determining means determines
that the biological signals sequentially transmitted
from the transmitting means are the biological signals
15 patterned in accordance with the rule, discriminating
means for discriminating whether the value of the biolo-
gical information calculated by the calculating means
falls within a predetermined range, and alarming means
for, if the discriminating means discriminates that the
20 value of the biological information calculated by the
calculating means falls within the predetermined range,
displaying the biological information calculated by the
calculating means and if the discriminating means
discriminates that the value of the biological infor-
25 mation calculated by the calculating means falls outside
the predetermined range, generating an alarm sound indi-
cating that the value of the biological information

calculated by the calculating means is an abnormal value.

Still another arrangement of the present invention comprises biological signal detecting means to be put on
5 a human body to sequentially detect biological signals generated by the human body, radio signal transmitting means for sequentially transmitting the biological signals sequentially detected by the biological signal detecting means in the form of radio signals, radio
10 signal receiving means for receiving the biological signals sequentially transmitted in the form of radio signals from the radio signal transmitting means, determining means for determining whether the biological signals sequentially received by the radio signal
15 receiving means correspond to the biological signals sequentially detected by the biological signal detecting means, calculating means for calculating a value of biological information corresponding to the received biological signals if the determining means determines
20 that the biological signals sequentially received by the radio signal receiving means correspond to the biological signals sequentially detected by the biological signal detecting means, and display means for displaying the value of the biological information calculated by
25 the calculating means.

Still another arrangement of the present invention comprises biological signal detecting means to be put on

a human body to sequentially detect biological signals generated by the human body, radio signal transmitting means for sequentially transmitting the biological signals sequentially detected by the biological signal
5 detecting means in the form of radio signals, radio signal receiving means for receiving the biological signals sequentially transmitted in the form of radio signals from the radio signal transmitting means, determining means for determining whether the biological
10 signals sequentially received by the radio signal receiving means correspond to the biological signals sequentially detected by the biological signal detecting means, calculating means for calculating a value of biological information corresponding to the received
15 biological signals if the determining means determines that the biological signals sequentially received by the radio signal receiving means correspond to the biological signals sequentially detected by the biological signal detecting means, discriminating means for discriminating whether the value of the biological information
20 calculated by the calculating means falls within a predetermined range, and alarming means for, if the discriminating means discriminates that the value of the biological information calculated by the calculating
25 means falls within the predetermined range, displaying the biological information calculated by the calculating means and if the discriminating means discriminates that

the value of the biological information calculated by the calculating means falls outside the predetermined range, generating an alarm sound indicating that the value of the biological information calculated by the calculating means is an abnormal value.

Still another arrangement of the present invention is a biological signal transmitter for sequentially receiving biological signals in the form of radio signals sequentially detected by biological signal detecting means put on a human body to sequentially detect the biological signals generated by the human body, and sequentially transmitting, in the form of radio signals, the biological signals sequentially received in the form of radio signals, the biological signal transmitter comprising radio signal receiving means for sequentially receiving the biological signals sequentially detected by the biological signal detecting means in the form of radio signals, and biological signal transmitting means for converting the biological signals sequentially received in the form of radio signals by the radio signal receiving means into biological signals patterned in accordance with a predetermined rule, and sequentially transmitting the converted biological signals in the form of radio signals.

This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a block diagram showing a monitor system to which the present invention is applied;

Fig. 2 is a view showing the arrangement of a shirt used in the monitor system;

5 Fig. 3 is a block diagram showing the circuit configuration of an electronic circuit incorporated in the shirt;

Fig. 4 is a block diagram showing the circuit configuration of a wristwatch used in the monitor system;

10 Fig. 5 is a block diagram showing the circuit configuration of a receiver unit and a monitor unit used in the monitor system;

Fig. 6 is a view showing the memory format of a RAM used in the monitor system;

15 Fig. 7 is a flow chart for explaining the operation of a controller used in the monitor system;

Fig. 8 is a flow chart for explaining the operation of the controller;

20 Figs. 9A to 9C are timing charts showing waveforms of an electrocardiogram waveform signal and the like;

Fig. 10 is a block diagram showing a monitor system according to another embodiment of the present invention;

25 Fig. 11 is a block diagram showing the circuit configuration of a wristwatch shown in Fig. 10;

Fig. 12 is a block diagram showing the circuit configuration of a receiver unit and a monitor unit

shown in Fig. 10;

Fig. 13 is a view showing the memory format of a RAM shown in Fig. 11;

Fig. 14 is a flow chart for explaining the operation of a controller shown in Fig. 11;

Fig. 15 is a flow chart for explaining the operation of the controller shown in Fig. 11;

Fig. 16 is a view showing a monitor system according to still another embodiment of the present invention;

Fig. 17 is a view showing a condition in that a detector unit and a receiver shown in Fig. 16 are put on a person to be monitored;

Fig. 18 is a block diagram showing the circuit configuration of the detector unit shown in Fig. 16;

Fig. 19 is a block diagram showing the circuit configuration of a transmission controller incorporated in the detector unit shown in Fig. 18;

Fig. 20 is a block diagram showing the circuit configuration of a receiver shown in Fig. 16;

Fig. 21 is a timing chart showing conditions of signal processing performed by a transmission controller incorporated in the detector unit shown in Fig. 18; and

Fig. 22 is a flow chart for explaining the operation of a controller shown in Fig. 16.

An embodiment of the present invention will be described below with reference to Figs. 1 to 9C.

Fig. 1 is a block diagram showing the arrangement of a monitor system to which the present invention is applied.

This monitor system simultaneously monitors pulse
5 rates of a plurality of persons to be monitored (e.g., patients in a hospital).

A plurality of shirts 1 as shown in Fig. 2 are put on a plurality of persons to be monitored. As shown in Fig. 3, each shirt 1 comprises a detector 12 including a
10 pair of electrodes 10a and 10b for detecting a biological signal, such as an electrocardiogram waveform, generated by a person to be monitored, and a transmitter 13 including a coil 2 for transmitting the biological signal detected by the detector 12 in the form of an
15 electromagnetic induction signal.

A plurality of wristwatches 3 are put on wrists of a plurality of persons to be monitored who wear the shirts 1. Each wristwatch 3 comprises a coil 4 for receiving the electromagnetic induction biological
20 signal transmitted from the coil 2 of the shirt 1 and an antenna 5 for transmitting a pulse rate signal obtained on the basis of the received biological signal in the form of a radio signal.

In each of the wristwatches 3, specific
25 identification (ID) code information for distinguishing a corresponding person to be monitored from another is set in an internal RAM 20 shown in Fig. 4. On the basis

of a biological signal transmitted from the shirt 1, the wristwatch 3 generates pulse rate data of a corresponding person to be monitored, converts the generated pulse rate data and the corresponding ID code data into a radio signal, and transmits the radio signal from the antenna 5.

A receiver unit 6 receives the pulse rate data and the ID code data of a person to be monitored transmitted from each of the wristwatches 3 through an antenna 7 and sends them to a monitor unit 8.

The monitor unit 8 simultaneously displays a plurality of pairs of the pulse rate data and the ID code data sent from the receiver unit 6 on a display 8A such as a CRT or a liquid crystal display, thereby monitoring the respective pulse rates of the persons (e.g., patients in a hospital) at the same time.

Fig. 2 is a view showing the arrangement of the shirt 1 used in the monitor system shown in Fig. 1.

A shirt main body 9 has a shape of, e.g., an athletic-style shirt. The pair of electrodes 10a and 10b are arranged at the right and left underarm positions of the shirt main body 9 and brought into contact with the skin of a person to be monitored having the shirt 1 on. The electrodes 10a and 10b detect an electrocardiogram waveform as a biological signal generated by the heart of the person and sends the detected biological signal to an electronic circuit 11

provided at an underarm position or a waist position of the shirt main body 9. The electronic circuit 11 transmits the detected biological signal in the form of a radio signal using electromagnetic induction from the coil 2 to the wristwatch 3. The signal may also be transmitted to the wristwatch 3 by a wire system using a connecting cord or the like.

Fig. 3 is a block diagram showing the circuit configuration of the electronic circuit 11 of the shirt 1.

The pair of electrodes 10a and 10b for detecting an electrocardiogram waveform generated by the heart of a person to be monitored are connected to the detector 12 and send an electrocardiogram waveform signal to the detector 12. The detector 12 amplifies the input electrocardiogram waveform signal from the electrodes 10a and 10b and sends the amplified electrocardiogram waveform signal to the transmitter 13.

This electrocardiogram waveform signal is, for example, a signal having a waveform as shown in Fig. 9A. The transmitter 13 converts the input electrocardiogram waveform signal from the detector 12 into an electromagnetic induction signal and transmits the converted signal from the coil 2. The electrocardiogram waveform signal in the form of the electromagnetic induction signal transmitted from the transmitter 13 is, for example, a signal having a waveform as shown in Fig. 9B. This electrocardiogram waveform signal can be received

satisfactorily within a distance of up to about two meters. A power source 14 contains a battery or the like and supplies a drive voltage to the detector 12 and the transmitter 13 via a power switch 15.

5 Fig. 4 is a block diagram showing the circuit configuration of the wristwatch 3 used in the monitor system shown in Fig. 1.

10 The coil 4 is a detecting coil for detecting the electrocardiogram waveform signal in the form of the electromagnetic induction signal transmitted from the coil 2 and is connected to a receiver 16. The receiver 16 receives the electrocardiogram waveform signal detected by the coil 4 and outputs the received biological signal to a wave-shaping circuit 17. The wave-shaping circuit 17 wave-shapes the input biological signal from the receiver 16 to convert it into a rectangular wave signal as shown in Fig. 9C and outputs the converted signal to a controller 18. Note that the receiver 16 and the wave-shaping circuit 17 start their operations in accordance with operation signals supplied from the controller 18.

25 The controller 18 is a central processing unit (CPU) for controlling the individual sections on the basis of microprograms prestored in a ROM 19, thereby performing various types of processing. A RAM 20 is a memory for storing various data. The RAM 20 will be described in more detail later with reference to Fig. 6.

A serial converter 21 converts pulse rate data and ID code data delivered parallel from the controller 18 into a serial signal and sends the serial signal to a transmitter 22. The transmitter 22 converts the
5 supplied serial signal into a radio signal and transmits the radio signal from the antenna 5. A display driver 23 outputs a display drive signal based on the input pulse rate data and ID code data from the controller 18 to a display 24, thereby driving the display 24. The
10 display 24 is constituted by, e.g., liquid crystal display elements, and displays pulse rate data in a one-to-one correspondence with a plurality of ID code data. The display 24 also displays a current time or the like on the basis of an oscillator 27.

15 A key input unit 25 includes a K1 key 25a for pulse rate measurement, a K2 key 25b for setting ID code data, and other keys, and outputs a key input signal corresponding to a key manipulation to the controller 18. The K1 key 25a for pulse rate measurement is a key for
20 inverting a flag register F0 (to be described later), thereby starting pulse rate measurement. The K2 key 25b for setting ID code data is a key for inverting a flag register F1 (to be described later), thereby setting ID code data.

25 An alarm unit 26 generates an alarm sound on the basis of an input alarm signal from the controller 18.

The oscillator 27 oscillates a clock signal of a predetermined frequency and applies the clock signal to a frequency-dividing/timing circuit 28. The frequency-dividing/timing circuit 28 frequency-divides the input
5 clock signal from the oscillator 27 to generate various timing signals, such as a time-count signal, and supplies them to the controller 18.

Fig. 5 is a block diagram showing the circuit configuration of the receiver unit 6 and the monitor unit 8
10 used in the monitor system shown in Fig. 1.

The antenna 7 for receiving pulse rate data and ID code data in the form of a radio signal transmitted from the antenna 5 of each wristwatch 3 is connected to a receiver 29. The receiver 29 receives the radio signal
15 detected by the antenna 7 and applies the received radio signal to a parallel converter 30. The parallel converter 30 converts the input radio signal from the receiver 29 into the pulse rate data and the ID code data in the form of parallel signals and applies the
20 data to a controller 31. The receiver 29 performs its operation in accordance with an operation signal supplied from the controller 31. The controller 31 is a central processing unit (CPU) for controlling the individual sections on the basis of microprograms prestored
25 in an internal ROM (not shown), thereby performing various types of processing. The controller 31 outputs the input pulse rate data and ID code data from the

parallel converter 30 to the monitor unit 8. The monitor unit 8 includes the display 8A, such as a CRT or a liquid crystal display, for simultaneously displaying a plurality of pairs of the input pulse rate data and ID code data from the controller 31. The monitor unit 8 also includes an alarm sound generator 8B for generating an alarm sound when the value of input pulse rate data from the controller 31 reaches a predetermine value or falls outside a predetermined range.

Fig. 6 is a view showing the memory format of the RAM 20 shown in Fig. 4.

Referring to Fig. 6, a display register stores data to be displayed on the display 24, and a time-count register stores current time data to be sequentially updated by time-count processing. The flag register F0 stores a flag indicating a condition of detection of a pulse rate signal, and the flag register F1 stores a flag indicating a condition of setting of ID code data.

An ID code register stores ID code data. The ID code data is, e.g., code data of eight bits set for each person to be monitored. Assume, for example, that ID code data for a person A to be monitored is "00000001" and ID code data for a person B to be monitored is "00000010".

A register T is for measuring a period T of a rectangular wave signal indicating

an electrocardiogram waveform as shown in Fig. 9C. Note that the ID code data need not be stored in a RAM but may be stored in a ROM or a rewritable EEPROM.

The operations of this embodiment will be described
5 below with reference to Figs. 7 and 8.

Fig. 7 is a flow chart showing the overall operation of the wristwatch 3.

Referring to Fig. 7, the controller 18 checks in step A1 whether "F0 = 1", i.e., the content of the flag
10 register F0 is "1". If YES is determined in step A1, the flow advances to step A2. If NO is determined in step A1, the flow advances to step A3. In this case, "F0 = 1" is determined if pulse rate measurement is set by the K1 key 25a for setting pulse rate measurement.
15 Otherwise, "F0 = 0" is determined.

If "F0 = 1" is determined in step A1, the flow advances to step A2. In step A2, pulse rate measurement processing is executed. This pulse rate measurement processing will be described in detail later with
20 reference to Fig. 8.

In step A3, the controller 18 checks whether a key input is present, i.e., the K1 key 25a for pulse rate measurement or the K2 key 25b for setting ID code data is manipulated. If YES in step A3, the flow advances to
25 step A7. If NO in step A3, the flow advances to step A4.

If neither the K1 key 25a nor the K2 key 25b are

manipulated, NO is determined in step A3, and the flow advances to step A4. In step A4, the controller 18 checks whether a time-count timing is set, i.e., a time-count signal is generated. If YES is determined in step
5 A4, the flow advances to step A5. If NO is determined in step A4, the flow advances to step A6.

If the time-count timing is set in step A4, the flow advances to step A5 to execute time-count processing. That is, the current time data stored in the
10 time-count register of the RAM 20 is updated.

In display processing in subsequent step A6, data stored in the display register is displayed on the display 24, and the flow returns to step A1.

If the K1 key 25a for pulse rate measurement, the
15 K2 key 25b for setting ID code data, or another key is manipulated on the key input unit 25, the flow advances from step A3 to step A7. In step A7, the controller 18 checks whether the K1 key 25a is manipulated. If YES is determined in step A7, the flow advances to step A8. If
20 NO is determined in step A7, the flow advances to step A9.

If manipulation of the K1 key 25a for pulse rate measurement is determined in step A7, the flow advances to step A8 to invert the content of the flag register F0
25 like "0 → 1" or "1 → 0". After executing the processing in step A8, the flow advances to the display processing in step A6.

If a key other than the K1 key 25a is manipulated, the flow advances from step A7 to step A9. In step A9, the controller 18 checks whether the K2 key 25b for setting ID code data is manipulated. If YES in step A9,
5 the flow advances to step A10. If NO in step A9, the flow advances to step A11.

If manipulation of the K2 key 25b is determined in step A9, the flow advances to step A10 to invert the content of the flag register F1 like "0 → 1" or "1 → 0".
10 After executing the processing in step A10, the flow advances to step A6.

If numeric keys are manipulated as other keys to input numerical data in step A9, the flow advances to step A11. In step A11, the controller 18 checks
15 whether "F1 = 1", i.e., the content of the flag register F1 is "1". If YES in step A11, the flow advances to step A12. If NO in step A11, the flow advances to step A13.

If "F1 = 1" in step A11, this indicates that
20 setting of ID code data is required, so the flow advances to step A12. In step A12, the input numerical data is stored as ID code data in the ID code register of the RAM 20. Thereafter, the flow advances from step A12 to step A6.

25 If "F1 = 1" is not determined in step A11, the flow advances to step A13 to execute other processing (e.g., time setting). Thereafter, the flow advances to step

A6.

The details of the pulse rate measurement processing executed in step A2 will be described below with reference to Fig. 8.

5 In step B1, the controller 18 checks whether a biological signal is present.

That is, the controller 18 checks whether an electrocardiogram waveform signal transmitted by electromagnetic induction from the shirt 1 is detected
10 by the coil 4. If YES is determined in step B1, the flow advances to step B2. If NO is determined in step B1, the flow advances to step B4.

If no electrocardiogram waveform signal is detected yet in step B1, the flow advances to step B4. In step
15 B4, the content of the register T is incremented by one. That is, a period T from a preceding biological signal to a current biological signal is measured by the register T. After executing the processing in step B4, the pulse rate measurement processing shown in Fig. 8 is
20 ended.

If a biological signal is detected, YES is determined in step B1, and processing in step B2 is executed. In step B2, pulse rate calculation processing is executed. That is, since the period T from a preceding
25 biological signal to a current biological signal is measured by the register T, pulse rate data is calculated on the basis of this measured time.

In subsequent step B3, the transmitter 22 transmits the calculated pulse rate data and the ID code data stored in the RAM 20. That is, the controller 18 outputs the pulse rate data and the ID code data to the serial converter 21. The serial converter 21 converts the input pulse rate data and ID code data from the controller 18 into a serial signal and applies it to the transmitter 22. The transmitter 22 converts the input serial signal into a radio signal and transmits it from the antenna 5. After the transmission, the content of the register T is cleared.

The receiver unit 6 receives the radio signal of the pulse rate data and the ID code data by the antenna 7 and sends the received signal to the monitor unit 8. In this case, the receiver unit 6 distinguishes one pulse rate data from another on the basis of their ID code data. Therefore, even if pulse rate data are transmitted from a plurality of the wristwatches 3, pulse rate data of a given person to be monitored can be discriminated from that of another. The monitor unit 8 displays the received pulse rate data in a one-to-one correspondence with the ID code data on the display 8A. In this case, if the value of the pulse rate data of a given person to be monitored exceeds a predetermined value or range, the monitor unit 8 generates an alarm sound, for example, from the alarm sound generator 8B, thereby informing a doctor, a nurse, or an intensive

care center of this abnormal value of the pulse rate data of the person.

According to this embodiment, it is possible to simultaneously detect a plurality of pieces of biological information, such as electrocardiogram waveforms, heart rates, or blood pressures and to simultaneously transmit pulse rate data as biological information of a plurality of persons to be monitored in a one-to-one correspondence with ID code data to the monitor unit 8. Therefore, a plurality of persons to be monitored can be reliably and easily monitored through the monitor unit 8.

Fig. 10 is a block diagram showing the arrangement of another embodiment of a monitor system to which the present invention is applied.

This monitor system simultaneously monitors pulse rates of a plurality of persons to be monitored. If an abnormality occurs in a pulse rate of a given person to be monitored, the monitor system automatically makes contact with a nurse, an emergency contact center, or the like by phone.

As in the above first embodiment, a plurality of shirts 1 are put on a plurality of persons to be monitored. Each shirt 1 includes a pair of electrodes 10a and 10b for detecting an electrocardiogram waveform signal as a biological signal of a person to be monitored having the shirt 1 on, and a coil 2 for

transmitting the detected biological signal in the form of an electromagnetic induction signal.

5 A plurality of wristwatches 3 are put on wrists of persons to be monitored each having the shirt 1 on as in the first embodiment. Each wristwatch 3 includes a receiving coil 4 for receiving the electromagnetic induction biological signal transmitted from the shirt 1 and an antenna 5 for transmitting a contact designation signal for informing an abnormality in the form of a
10 radio signal.

In each of a plurality of wristwatches 3, specific ID code data for distinguishing a corresponding person to be monitored from another is set in an internal RAM 20. The wristwatch 3 calculates pulse rate data on the
15 basis of a biological signal transmitted from the shirt 1. If the pulse rate data falls outside a predetermined range, the wristwatch 3 generates an alarm sound for informing a corresponding person to be monitored of the abnormality. If the person determines that the alarm
20 sound is erroneously generated, he or she stops the alarm sound by manipulating a K3 key 25c for stopping an alarm sound. If the person to be monitored himself or herself feels that the physical condition becomes worse, this means that the alarm sound is not a false alarm.
25 Therefore, the person need not manipulate the K3 key 25c but just leaves the alarm generated.

If the K3 key 25c is not manipulated and

a predetermined time (e.g., 30 seconds) has elapsed since the alarm sound is started to be generated, the wristwatch 3 automatically transmits a contact designation signal for informing the third person of the abnormality in a pulse rate together with ID code data for
5 identifying the person to be monitored from the antenna 5 in the form of a radio signal.

A receiver unit 6 receives the contact designation signals and the ID code data transmitted from a plurality of wristwatches 3 through an antenna 7 and sends
10 the received contact designation signals and ID code data to an auto-dialing unit 80. The auto-dialing unit 80 is connected to a telephone line communicating with an emergency contact center 81 such as a nurse center.
15 When the contact designation signal and the ID code data are sent from the receiver unit 6, the auto-dialing unit 80 automatically calls the emergency contact center 81 in accordance with a predetermined telephone number corresponding to the ID code data.

20 Note that the arrangement of the shirt 1 and the circuit configuration of an electronic circuit 11 provided in the shirt 1 are the same as those in the first embodiment described above.

The circuit configuration of the wristwatch 3 shown
25 in Fig. 11 is also basically similar to that used in the above embodiment except that a key input unit 25 includes the K3 key 25c for stopping an alarm sound in

addition to a K1 key 25a for pulse rate measurement, a
K2 key 25b for setting ID code data, and other keys.
The K3 key 25c for stopping an alarm sound is manipu-
lated in order to stop an alarm sound currently being
5 generated.

Fig. 12 is a block diagram showing the circuit con-
figuration of the receiver unit 6 and the auto-dialing
unit 80. The antenna 7 is for receiving a contact
designation signal and an ID code signal in the form of
10 a radio signal transmitted from the antenna 5 of the
wristwatch 3 and is connected to a receiver 29. The
receiver 29 receives the radio signal detected by the
antenna 7 and applies the received radio signal to a
parallel converter 30. The parallel converter 30 con-
15 verts the input radio signal from the receiver 29 into
parallel signals and applies them to a controller 31.
The receiver 29 performs its operation in accordance
with an operation signal supplied from the controller
31. The controller 31 is a central processing unit
20 (CPU) for controlling the individual sections on the
basis of microprograms prestored in an internal ROM (not
shown), thereby performing various types of processing.
On the basis of the input parallel signals from the
parallel converter 30, the controller 31 outputs the
25 contact designation signal and the ID code data to the
auto-dialing unit 80. The auto-dialing unit 80
prestores a plurality of telephone numbers in

a one-to-one correspondence with the ID code data in a
TEL NO. memory 82. When the controller 31 outputs the
contact designation signal and the ID code data, the
auto-dialing unit 80 reads out a telephone number
5 corresponding to the ID code data from the TEL NO.
memory 82 and automatically calls the emergency contact
center 81 in accordance with the readout telephone
number.

Fig. 13 is a view showing the memory format of the
10 RAM 20 shown in Fig. 11.

Referring to Fig. 13, a display register stores
data to be displayed on a display 24, and a time-count
register stores current time data to be sequentially
updated by time-count processing. A flag register F0
15 stores a flag indicating a condition of detection of a
pulse rate signal, a flag register F1 stores a flag
indicating a condition of setting of ID code data, and a
flag register F2 stores a flag indicating a condition of
alarming. An ID code register stores ID code data. The
20 ID code data is, e.g., code data of eight bits set for
each person to be monitored. Assume, for example, that
ID code data for a person A to be monitored is
"00000001" and ID code data for a person B to be moni-
tored is "00000010". A register T is for measuring a
25 period T of an electrocardiogram waveform signal as
shown in Fig. 9C of the above first embodiment. A
register C is for measuring an alarm time. A maximum

pulse rate register stores maximum pulse rate data indicating the upper limit of pulse rate data. A minimum pulse rate register stores minimum pulse rate data indicating the lower limit of pulse rate data.

5 The operations of this embodiment of the present invention will now be described below with reference to Figs. 14 and 15. Fig. 14 is a flow chart showing the overall operation of the wristwatch 3 according to this embodiment.

10 Referring to Fig. 14, a controller 18 checks in step C1 whether "F0 = 1", i.e., the content of the flag register F0 is "1". If YES is determined in step C1, the flow advances to step C2. If NO is determined in step C1, the flow advances to step C3. If the K1 key
15 25a for pulse rate measurement is manipulated to set pulse rate measurement, "F0 = 1" is determined. Otherwise, "F0 = 0" is determined.

 If "F0 = 1" in step C1, the flow advances to step C2. In step C2, pulse rate measurement processing is
20 executed. The details of this pulse rate measurement processing will be described later with reference to Fig. 15.

 In subsequent step C3, the controller 18 checks whether a key input is present, i.e., any of the K1 to
25 K3 keys 25a to 25c and other keys is manipulated on the key input unit 25. If YES in step C3, the flow advances to step C7. If NO in step C3, the flow advances to step

C4.

If no key is manipulated yet, NO is determined in step C3, and the flow advances to step C4. In step C4, the controller 18 checks whether a time-count timing is set, i.e., a time-count signal is generated. If YES is determined in step C4, the flow advances to step C5. If NO is determined in step C4, the flow advances to step C6.

If the time-count timing is set in step C4, the flow advances to step C5 to execute time-count processing. That is, the current time data stored in the time-count register of the RAM 20 is updated.

In subsequent step C6, the controller 18 checks whether "F2 = 1". If YES in step C6, the flow advances to step C7. If NO in step C6, the flow advances to step C10. The flag register F2 is a register for storing a condition of execution of alarm processing, and "F2 = 1" means that alarming is currently being executed.

If no alarming is currently being executed so "F2 = 0", the flow advances from step C6 to step C10. In display processing in step C10, the data stored in the display register is displayed on the display 24. Thereafter, the flow returns to step C1.

If "F2 = 1", i.e., alarming is currently being executed, the flow advances from step C6 to step C7. In step C7, the content of the register C is incremented by one to measure the alarm time. In step C8, the

controller 18 checks whether "C = 30 seconds", i.e., the content of the register C has reached a value corresponding to "30 seconds". If the alarm time has not reached 30 seconds, NO is determined in step C8, and the flow advances to step C10. If the alarm time has
5 reached 30 seconds, YES is determined in step C8, and the flow advances to step C9.

In step C9, a transmitter 22 transmits a contact designation signal indicating an abnormality in pulse rate data and ID code data stored in the RAM 20. That
10 is, the controller 18 outputs the contact designation signal and the ID code data to a serial converter 21. The serial converter 21 converts the input contact designation signal and ID code data from the controller
15 18 into a serial signal and applies it to the transmitter 22. The transmitter 22 converts the input serial signal into a radio signal and transmits it from the antenna 5. The receiver unit 6 receives the contact designation signal and the ID code data in the form of a
20 radio signal through the antenna 7 and sends it to the auto-dialing unit 80. In this case, the receiver unit 6 distinguishes a given contact designation signal from another on the basis of their ID code data. Therefore, even if contact designation signals are transmitted from
25 a plurality of the wristwatches 3, a contact designation signal for a given person to be monitored can be discriminated from another. The auto-dialing unit 80 performs

automatic dialing in accordance with a telephone number corresponding to the received ID code data. After executing the processing in step C9, the flow advances to step C10.

5 If any of the K1 to K3 keys 25a to 25c and other keys is manipulated on the key input unit 25, the flow advances from step C3 to step C11. In step C11, the controller 18 checks whether the K1 key 25a for pulse rate measurement is manipulated. If YES is determined
10 in step C11, the flow advances to step C12. If NO is determined in step C11, the flow advances to step C13.

 If manipulation of the K1 key 25a is determined in step C11, the flow advances to step C12, and the content of the flag register F0 is inverted like "0 → 1" or
15 "1 → 0". After executing the processing in step C12, the flow advances to the display processing in step C10. If a key other than the K1 key 25a for pulse rate measurement is manipulated in step C11, the flow advances to step C13.

20 In step C13, the controller 18 checks whether the K2 key 25b for setting ID code data is manipulated. If YES in step C13, the flow advances to C14. If NO in step C13, the flow advances to step C15. If manipulation of the K2 key 25b is determined in step C13, the
25 flow advances to step C14, and the content of the flag register F1 is inverted like "0 → 1" or "1 → 0". After executing the processing in step C14, the flow advances

to step C10.

If a key other than the K1 key 25a for pulse rate measurement and the K2 key 25b for setting ID code data is manipulated, NO is determined in each of steps C11
5 and C13, and the flow advances to step C15. In step C15, the controller 18 checks whether the K3 key 25c for stopping an alarm sound is manipulated. If YES in C15, the flow advances to step C16. If NO in step C15, the flow advances to step C10.

10 If manipulation of the K3 key 25c is determined in step C15, the flow advances from step C15 to step C16, and the controller 18 checks whether "F2 = 1". If YES is determined in step C16, the flow advances to step C17. If NO is determined in step C16, the flow advances
15 to step C10. As described above, the flag register F2 stores a condition of execution of alarm processing, and "F2 = 1" means that alarming is currently being executed.

If "F2 = 1" is determined, the flow advances from
20 step C16 to step C17. In step C17, "0" is written in the flag register F2, and the content of the register C is cleared to reset the alarm time to "0". The flow advances from step C17 to step C10.

If numeric keys, for example, are manipulated as
25 other keys to input numerical data in step C15, the flow advances to step C18. In step C18, the controller 18 checks whether "F1 = 1". If YES in step C18, the flow

advances to step C19. If NO in step C18, the flow advances to step C20.

If "F1 = 1" is determined in step C18, this means that setting of ID code data is required, so the flow
5 advances to step C19 to store the input numerical data as ID code data in the ID code data register of the RAM 20. After executing the processing in step C19, the flow advances to step C10.

If "F1 = 1" is not determined in step C18, the flow
10 advances to step C20 to execute other processing (e.g., time setting, or setting of maximum or minimum pulse rate data), and the flow advances to step C10.

The details of the pulse rate measurement processing will be described below with reference to
15 Fig. 15.

In step D1, the controller 18 checks whether an electrocardiogram waveform signal is present.

That is, the controller 18 checks whether an electrocardiogram waveform signal transmitted by
20 electromagnetic induction from the shirt 1 is detected by the receiving coil 4. If YES is determined in step D1, the flow advances to step D2. If NO is determined in step D1, the flow advances to step D6.

If no electrocardiogram waveform signal is detected
25 yet in step D1, the flow advances to step D6. In step D6, the content of the register T is incremented by one.

That is, the register T measures a period T from

a preceding electrocardiogram waveform signal to a current electrocardiogram waveform signal. After executing the processing in step D6, the pulse rate measurement processing shown in Fig. 8 is ended.

5 If an electrocardiogram waveform signal is detected, YES is determined step D1, and processing in step D2 is executed. In step D2, pulse rate calculation processing is executed. That is, since the period T from a preceding electrocardiogram waveform signal to a
10 current electrocardiogram waveform signal is measured by the register T, pulse rate data is calculated on the basis of this measured time.

 In subsequent step D3, the controller 18 checks whether the calculated pulse rate data falls outside the
15 range of the maximum and minimum pulse rate data prestored in the RAM 20.

 If the pulse rate data falls outside this range, YES is determined in step D3, and the flow advances to step D4. In step D4, "1" is written in the flag
20 register F2 to set alarm processing, and the controller 18 outputs an alarm signal to an alarm unit 26, thereby causing the alarm unit 26 to generate an alarm sound.
 If a patient as a person to be monitored who notices this alarm sound actually feels that the physical con-
25 dition becomes worse, he or she leaves the alarm sound generated. If, on the other hand, the patient determines that the detection of an abnormality in pulse rate

data is an erroneous operation, he or she stops the alarm sound by manipulating the K3 key 25c for stopping an alarm sound.

If the alarm sound is not stopped by manipulation
5 of the K3 key 25c performed by the person to be monitored and 30 seconds have elapsed since the alarm sound is started to be generated, YES is determined in step C8 of Fig. 14, and the processing in step C9 is executed. That is, the wristwatch 3 transmits a contact designation
10 tion signal and ID code data. The receiver unit 6 receives these signals, and the auto-dialing unit 80 immediately performs automatic dialing.

If the alarm sound is generated by an erroneous operation of the wristwatch 3, the person to be monitored
15 manipulates the K3 key 25c for stopping an alarm sound at once. Therefore, the processing in step C17 is executed to disable the alarm processing, thereby immediately stopping the alarm sound currently being generated. After executing the processing in step D4,
20 the pulse rate measurement processing shown in Fig. 15 is ended.

If the value of pulse rate data falls within the predetermined range, NO is determined in step D3, and the flow advances to step D5. In step D5, the content
25 of the register T is cleared, and the pulse rate measurement processing of Fig. 15 is ended.

In hospitals and the like, a system in which each

patient pushes a button provided at a bedside when his or her condition goes worse and in this manner informs nurses of the state of emergency is generally put into practical use. In this system, however, if the condition of a patient is so bad that he or she cannot push the button himself or herself, it is impossible to inform nurses of this emergent state. For this reason, an automatic emergency informing system has been planned in which the conditions of patients are monitored constantly, and if an abnormality is detected in a given patient, an emergency contact center, such as a nurse center, is automatically informed of this detection of the abnormality.

In such an automatic emergency informing system, however, even if an detector erroneously detects an abnormality in a patient, this erroneous detection is automatically informed against the will of the patient. Therefore, the load on nurses or the like may be increased due to false emergency contacts caused by these erroneous operations.

This embodiment adopts the arrangement as described above in order to eliminate this conventional inconvenience. Therefore, it is possible to prevent a false emergency contact caused by an erroneous operation.

Note that in each of the above embodiments, pulse rate data is monitored constantly. However, the data may be monitored for each predetermined time interval

such as 30 seconds or one minute. In addition, biological data to be monitored is not limited to pulse rate data but may be electrocardiogram waveform data corresponding to an electrocardiogram waveform signal,
5 blood pressure data, or body temperature data.

Furthermore, in the above embodiments, the monitor unit generates an alarm sound when the value of pulse rate data of a person to be monitored falls outside a predetermined range. However, this alarm sound may also
10 be generated by the alarm unit 26 of the wristwatch 3. In addition, the portable electronic instrument is not limited to a wristwatch to be put on a wrist but may be an electronic instrument to be put on an arm or an electronic instrument having a size capable of being put
15 into a pocket.

A personal computer or the like may also be used as the monitor unit.

Still another embodiment of the present invention will be described below with reference to Figs. 16 to
20 22.

Fig. 16 is a view showing a monitor system according to this embodiment.

Referring to Fig. 16, reference numeral 101 denotes a detector unit to be put directly on a portion of a
25 body of a person to be monitored where a heartbeat can be reliably detected, such as a lower portion of the left chest. The detector unit 101 transmits a detected

heartbeat signal by electromagnetic induction
(represented by "EM" in Fig. 16). Reference numeral 102
denotes a receiver to be put on, e.g., the left wrist of
a person to be monitored. The receiver 102 receives the
5 heartbeat signal transmitted by electromagnetic induction
from the detector unit 101 and displays the heart
rate. The receiver 102 also stabilizes the heartbeat
signal by performing error correction for the signal and
then performs abnormality check of the heartbeat. If an
10 abnormality is detected, the receiver 102 superposes a
signal indicating occurrence of the abnormality on a
carrier frequency (represented by RF in Fig. 16) and
transmits the signal as a radio signal. Reference
numeral 103 denotes a managing unit connected to, e.g.,
15 a telephone set 104. The managing unit 103 receives the
signal indicating occurrence of the abnormality super-
posed on the carrier frequency and transmitted from one
or a plurality of receivers 102 and informs doctors or
nurses of this reception of the signal. The detector
20 unit 101, the receiver 102, and the managing unit 103
constitute a constant heartbeat monitor system according
to this embodiment of the present invention.

Fig. 17 is a view showing a condition in which the
detector unit 101 and the receiver 102 are put on a per-
25 son 105 to be monitored. As shown in Fig. 17, the
detector unit 101 is fixed by a band 106 or the like on
a lower portion of the left chest of the person 105

where a heartbeat can be reliably detected, such that a pair of electrodes 10a and 10b projecting from its surface are brought into contact with the skin of a portion immediately above the heart. A heartbeat detected by
5 the detector unit 101 is signalized into a predetermined pattern and transmitted by electromagnetic induction within an effective range of, e.g., 70 to 80 cm. This electromagnetic induction signal is received by the wristwatch-like receiver 102 put on the left wrist of
10 the person 105.

The receiver 102 performs error correction, i.e., noise removal and interpolation for the received heartbeat signal of electromagnetic induction in accordance with the above pattern. Thereafter, the receiver 102
15 restores the original heartbeat signal using a complementary pattern of the above pattern, calculates a heart rate, and checks the presence/absence of an abnormality such as arrhythmia. If an abnormality is detected, the receiver 102 transmits a radio signal indicating
20 occurrence of the abnormality to the managing unit 103 not shown in Fig. 17.

Fig. 18 shows the arrangement of an electronic circuit provided in the detector unit 101. Referring to Fig. 18, reference numeral 111 denotes a heartbeat
25 detector for amplifying the myoelectric potential difference of a human body obtained by the pair of electrodes 10a and 10b in contact with the above

predetermined portion of the person 105 to be monitored. The detector 111 then filters the amplified potential difference to generate a heartbeat signal a and outputs the signal to an EM transmission controller 112.

5 The EM transmission controller 112 has an internal oscillator 112a. In addition, a capacitor 113 and a resistor 114 are externally connected in series with the controller 112. The EM transmission controller 112 converts the heartbeat signal a from the heartbeat
10 detector 111 into a patterned heartbeat signal b and outputs the signal to the base electrode of an NPN transistor 116 via a resistor 115.

 A capacitor 117 is connected between the collector and emitter electrodes of the transistor 116. The
15 collector electrode is connected to one terminal of an electromagnetic induction coil 118, and the emitter electrode is connected to the EM transmission controller 112. A voltage VCC is applied to the other terminal of the electromagnetic induction coil 118 and one terminal
20 of a capacitor 120 through a resistor 119. The other terminal of the capacitor 120 is connected to the emitter electrode of the transistor 116.

 Fig. 19 shows the circuit configuration of the EM transmission controller 112. Referring to Fig. 19, the
25 input heartbeat signal a from the heartbeat detector 111 is applied to a clock terminal CK of a heartbeat pulse counter 121, the reset terminal of a flip-flop (to be

referred to as an F/F hereinafter) 122 constituted by two NOR gates, and a reset terminal R of a clock counter 123. A fundamental clock c is applied to AND gates 124 and 125 from the internal oscillator 112a.

5 The heartbeat pulse counter 121 is a base-n counter for sequentially counting pulses of the heartbeat signal a. In this embodiment, the counter 121 operates as a ternary counter ($n = 3$), and its count g is supplied to a coincidence circuit 126. A coincidence signal d from
10 the coincidence circuit 126 is applied to the set terminal of the F/F 122, and an inverted output of the signal is applied to the AND gate 124 as a gate control signal. The AND gate 124 operates as a clock gate and applies its output to a clock terminal CK of the clock
15 counter 123.

 The clock counter 123 is a four-bit counter for counting pulses of the fundamental clock c applied via the AND gate 124 after being reset by the heartbeat signal a. Two upper bits of the clock counter 123 are
20 supplied as a count f to the coincidence circuit 126.

 The coincidence circuit 126 compares the count g from the heartbeat pulse counter 121 with the count f from the clock counter 123. If a coincidence is determined, the coincidence circuit 126 inverts the coincidence signal d through the set terminal of the F/F 122
25 and an inverter 127 and sends the inverted signal to the AND gate 125. The output from the AND gate 125 is

supplied as a heartbeat signal b to the base electrode of the transistor 116 via the resistor 115.

Fig. 20 shows the internal circuit configuration of the receiver 102. Referring to Fig. 20, electromagnetic induction obtained by the electromagnetic induction coil 118 of the detector unit 101 is frequency-selected and received by an electromagnetic induction coil 132. The coil 132 and a capacitor 133 are connected in parallel with an EM receiver 131. The EM receiver 131 converts the received electromagnetic induction into a pulse signal and sends the signal to a CPU 134.

The CPU 134 controls operations of the individual circuits in the receiver 102 on the basis of the signal from the EM receiver 131. The CPU 134 is connected to an arithmetic unit 135 for calculating a heart rate and the like, a time-counter 136 for performing a time-count operation, and a heart rate register (represented by "HR" in Fig. 20) 137 for holding a heart rate. The CPU 134 is also connected to a pulse counter 138 for counting pulse signals from the EM receiver 131, and a register unit 139 including a tn register 139a, a pn register 139b, a tn-1 register 139c, and a pn-1 register 139d. The register unit 139 reversely patterns the signal from the EM receiver 131. The CPU 134 outputs data to be displayed, such as a time and a heart rate, to a display 140 constituted by liquid crystal display elements, and a signal indicating occurrence of

an abnormality to an RF transmitter 141.

The RF transmitter 141 superposes the signal indicating occurrence of an abnormality supplied from the CPU 134 on a carrier frequency and transmits the signal
5 to the managing unit 103 shown in Fig. 16.

The operation of the above embodiment will be described below.

An operation of generating the patterned heartbeat signal b from the heartbeat signal a performed by the
10 EM transmission controller 112 of the detector unit 101 will be described first with reference to Fig. 21.

As indicated by (1) in Fig. 21, pulses of the heartbeat signal a supplied from the heartbeat detector 111 are counted by the heartbeat pulse counter 121 as a
15 ternary counter in the EM transmission controller 112. The count is set at "1" as an initial value as indicated by (4) in Fig. 21, and the F/F 122 and the clock counter 123 are reset.

Resetting of the F/F 122 enables the AND gate 124,
20 so pulses of the fundamental clock c indicated by (2) in Fig. 21 are counted by the clock counter 123 via the AND gate 124 as indicated by (3) in Fig. 21.

As described above, this clock counter 123 is a four-bit counter, and its two upper bits are supplied as
25 the count f to the coincidence circuit 126. While the count of the clock counter 123 is "0 (0000)" to "3 (0011)", the value of its two upper bits is "00".

Therefore, the coincidence circuit 126 determines that the count "1" of the heartbeat pulse counter 121 does not coincide with the count of the clock counter 123 and sets its coincidence signal d to level "L" as indicated
5 by (5) in Fig. 21. This coincidence signal d is inverted to level "H" by the inverter 127, and this enables the AND gate 125. Therefore, as indicated by (6) in Fig. 21, four pulses of the fundamental clock c are directly output as the heartbeat signal b via the
10 AND gate 125.

Thereafter, when the input fundamental clock c to the clock counter 123 increments its count to "4 (0100)", the value of the two upper bits of the counter 123 becomes "01". The coincidence circuit 126 deter-
15 mines that this value coincides with the count "1" of the heartbeat pulse counter 121 and raises its coincidence signal d from level "L" to "H" as indicated by (5) in Fig. 21. This coincidence signal d sets the F/F 122 to disable the AND gate 124, thereby stopping the
20 count operation of the clock counter 123. The coincidence signal is also inverted to level "L" by the inverter 127, and this disables the AND gate 125. As a result, after four pulses of the fundamental clock c are successively output, the heartbeat signal b is kept at
25 level "L" until the next pulse of the heartbeat signal a is applied.

The next input pulse of the heartbeat signal a

increments the count of the heartbeat pulse counter 121 to "2 (10)" and resets the F/F 122 and the clock counter 123 again.

Similarly, while the count of the clock counter 123 is "0 (0000)" to "7 (0111)", the coincidence circuit 126 determines that the count "2 (10)" of the heartbeat pulse counter 121 does not coincide with the count of the clock counter 123 and sets its coincidence signal d to level "L" as indicated by (5) in Fig. 21. This coincidence signal d is inverted to level "H" by the inverter 127, and this enables the AND gate 125. Therefore, as indicated by (6) in Fig. 21, eight pulses of the fundamental clock c are directly output as the heartbeat signal b via the AND gate 125.

Thereafter, when the input fundamental clock c to the clock counter 123 increments its count to "8 (1000)", the value of the two upper bits of the clock counter 123 becomes "10". Therefore, the coincidence circuit 126 determines that this value coincides with the counter "2 (10)" of the heartbeat pulse counter 121 and raises its coincidence signal d from level "L" to "H" as indicated by (5) in Fig. 21. This coincidence signal d sets the F/F 122 to disable the AND gate 124, thereby stopping the count operation of the clock counter 123. The coincidence signal d is also inverted to level "L" by the inverter 127, and this disables the AND gate 125. As a result, after eight pulses of the

fundamental clock c are successively output, the heartbeat signal b is kept at level "L" until the next pulse of the heartbeat signal a is input.

The next input pulse of the heartbeat signal a
5 increments the count of the heartbeat pulse counter 121 to "3 (11)" and resets the F/F 122 and the clock counter 123 again.

As described above, while the count of the clock counter 123 is "0 (0000)" to "11 (1011)", the coincidence circuit 126 determines that the count "3 (11)"
10 of the heartbeat pulse counter 121 does not coincide with the count of the clock counter 123 and sets its coincidence signal d to level "L" as indicated by (5) in Fig. 21. This coincidence signal d is inverted to level
15 "H" by the inverter 127, and this enables the AND gate 125. Therefore, as indicated by (6) in Fig. 21, twelve pulses of the fundamental clock c are directly output as the heartbeat signal b via the AND gate 125.

Thereafter, when the input fundamental clock c to
20 the clock counter 123 increments its count to "12 (1100)", the value of the two upper bits of the clock counter 123 becomes "11". Therefore, the coincidence circuit 126 determines that this value coincides with the count "3 (11)" of the heartbeat pulse counter 121
25 and raises its coincidence signal d from level "L" to "H" as indicated by (5) in Fig. 21. This coincidence signal d sets the F/F 122 to disable the AND gate 124,

thereby stopping the count operation of the clock counter 123. The coincidence signal d is also inverted to level "L" by the inverter 127, and this disables the AND gate 125. As a result, after twelve pulses of the
5 fundamental clock c are successively output, the heartbeat signal b is kept at level "L" until the next pulse of the heartbeat signal a is input.

In this manner, each time the pulse of the heartbeat signal a is applied, the EM transmission controller
10 112 outputs the fundamental clock c as the heartbeat signal b in accordance with a predetermined pattern of the number of pulses of "four", "eight", "twelve", "four", "eight", "twelve"....

This heartbeat signal b controls switching of the
15 transistor 116, and the electromagnetic induction coil 118 is excited by the voltage V_{CC} to generate an electromagnetic induction signal.

In the receiver 102, on the other hand, the CPU 134 performs reception processing as shown in Fig. 22 for
20 the electromagnetic induction signal transmitted from the detector unit 101 as described above, in accordance with programs stored in an internal ROM (not shown).

The processing shown in Fig. 22 is executed when the EM receiver 131 pulses a signal received by the
25 electromagnetic induction coil 132 and sends the pulsed signal to the CPU 134. In step S1, the CPU 134 causes the pulse counter 138 to count the input successive

pulses from the EM receiver 131 and holds the number of pulses in the pn register 139b of the register unit 139. At the same time, the CPU 134 reads out time data from the time-counter 136 at the time the pulse count is
5 started and holds the readout data in the tn register 139a of the register unit 139.

In step S2, the CPU 134 increments the number of pulses held in the pn register 139b by one to obtain a value "pn + 1" and checks by using the arithmetic unit
10 135 whether a value as a remainder obtained by dividing the value "pn + 1" by a constant "4" is larger than a constant "2". This is performed in order to check whether "three to five", "seven to nine", or "eleven to thirteen" successive pulses are received while an error
15 of "q1" is allowed for signals transmitted in accordance with the predetermined pattern of "four", "eight", or "twelve" pulses. If the remainder is larger than "2", i.e., the remainder is "3", the CPU 134 determines that the received signal is electromagnetic noise. In sub-
20 sequent step S10, therefore, the CPU 134 waits for next pulse reception. If a pulse is received, the CPU 134 repeats the processing from step S1.

If the CPU 134 determines in step S2 that the remainder obtained by dividing "pn + 1" by the constant
25 "4" is "2" or less, the flow advances to step S3. In step S3, the CPU holds the integral part of the quotient obtained by dividing "pn + 1" by the constant "4" in the

pn register 139b of the register 139.

This value held in the pn register 139b is supposed to coincide with one of the counts "1", "2", and "3" of the heartbeat pulse counter 121 of the EM transmission controller 112 of the detector unit 101. Therefore, in
5 subsequent step S4, the CPU 134 checks whether the value held in the pn register 139b is equal to "0" or larger than a constant "3".

If the value held in the pn register 139b is equal
10 to "0" or larger than the constant "3", the value does not coincide with possible values of the heartbeat pulse counter 121. Therefore, the CPU 134 determines that this received pulse is also electromagnetic noise, and waits for next pulse reception in step S10. If a pulse
15 is received, the CPU 134 repeats the processing from step S1.

If the CPU 134 determines in step S4 that the value held in the pn register 139b is one of "1", "2", and "3", it recognizes that the received pulse is a correct
20 one transmitted from the detector unit 101. Therefore, the CPU 134 causes the arithmetic unit 135 to perform the following operation using the values held in the tn register 139a, the pn register 139b, the tn-1 register 139c, and the pn-1 register 139d of the register unit
25 139:

$$(60/(tn - tn-1)) \cdot |pn - pn-1| \quad \dots (1)$$

The CPU 134 holds the operation result as a heart rate

in the heart rate register 137. In a part
"60/(tn - tn-1)" of equation (1), a constant "60" is
divided by a time difference between time data "tn"
corresponding to a current pulse reception timing and
5 time data "tn-1" corresponding to a preceding pulse
reception timing, thereby obtaining the period of a
heartbeat pulse. The result is multiplied by
"|pn - pn-1|" to perform interpolation for a case
wherein one of received pulses is omitted for some
10 reason. The obtained calculation result is held as a
heart rate per minute in the heart rate register 137.

Thereafter, the CPU 134 checks in step S6 whether
this value held in the heart rate register 137 falls
within a range of "30 to 200" which is generally con-
15 sidered to be normal.

If the value falls outside this range, the CPU 134
determines that the heartbeat of the person 105 to be
monitored is abnormal. In step S9, the CPU 134 causes
the RF transmitter 141 to transmit a signal indicating
20 occurrence of the abnormality to the managing unit 103,
thereby performing necessary alarm processing.

Thereafter, in step S10, the CPU 134 waits for next
pulse reception. If a pulse is received, the CPU 134
repeats the processing from step S1.

25 If the value held in the heart rate register 137
falls within the range of "30 to 200" in step S6, the
CPU 134 determines that the heartbeat is currently

normal, and the flow advances to step S7. In step S7, the CPU 134 transfers the current data held in the tn register 139a and the pn register 139b to the tn-1 register 139c and the pn-1 register 139d, respectively, as preceding data, in order to prepare for next pulse reception. In step S8, the CPU 134 causes the display 140 to display the heart rate held in the heart rate register 137. Thereafter, the CPU 134 waits for next pulse reception in step S10.

10 Note that in the above embodiment, a ternary counter is used as the heartbeat pulse counter 121 of the EM transmission controller 112 to enable interpolation for pulses received by the receiver 102 even if one of the pulses is omitted for some reason, as indicated by " $|pn - pn-1|$ " in equation (1). However, the use of a base-n counter ($n > 4$) makes it possible to perform interpolation for omission of " $n - 2$ " pulses upon pulse reception.

20 According to this embodiment as described above, a heartbeat signal sensed by a sensor in the detector unit put directly on the body of a person to be monitored is regularly patterned in accordance with a predetermined pattern before transmission. The receiver for receiving this heartbeat signal transmitted from the detector unit performs error correction, such as noise removal and interpolation, for the heartbeat signal in accordance with the pattern and then executes necessary processing.

This makes it possible to provide a constant heartbeat monitor system capable of correcting errors produced in an electromagnetic induction heartbeat signal which is easily affected by external electromagnetic noise during transmission and capable of performing calculation of a heartbeat or detection of an abnormality in a stable condition.

Claims:

1. A monitor system comprising:

a plurality of biological signal detecting means,
to be put on a plurality of human bodies, for indivi-
5 dually detecting biological signals generated by the
human bodies;

a plurality of first transmitting means each for
transmitting the biological signal detected by a
corresponding one of said biological signal detecting
10 means;

a plurality of second transmitting means each for
receiving the biological signal transmitted from a
corresponding one of said first transmitting means and
transmitting an ID code signal predetermined in
15 correspondence with the received biological signal
together with the biological signal in the form of a
radio signal; and

monitor means for receiving the radio signals
transmitted from said plurality of second transmitting
20 means and monitoring pieces of biological information
corresponding to the biological signals transmitted in
the form of radio signals in a one-to-one correspondence
with the ID code signals.

2. A system according to claim 1, wherein each of
25 said plurality of second transmitting means comprises
abnormality determining means for determining whether a
value of the biological signal transmitted from

a corresponding one of said plurality of first transmitting means is an abnormal value, and alarm determining means for determining in accordance with the determination result of said abnormality determining means whether an alarm sound is to be generated.

3. A system according to claim 1, wherein said monitor means comprises display means capable of visually displaying the biological information corresponding to the biological signals transmitted from said plurality of second transmitting means in a one-to-one correspondence with the ID code signals.

4. A system according to claim 1, wherein the radio signals transmitted from said plurality of second transmitting means are electromagnetic induction radio signals.

5. A system according to claim 1, wherein each of said second transmitting means is a portable device.

6. A system according to claim 1, wherein the biological signal generated by each of said plurality of human bodies includes a pulse rate signal generated by a human body.

7. A biological signal transmitter, to be put on a human body, for receiving an input biological signal from output means for detecting a biological signal generated by the human body and outputting the detected biological signal, and transmitting the received biological signal in the form of a radio signal to monitor

means for monitoring the content of the biological signal, said biological signal transmitter comprising:

receiving means for receiving the input biological signal from said output means; and

5 transmitting means for transmitting the biological signal received by said receiving means together with an ID code signal predetermined in correspondence with the received biological signal in the form of a radio signal to said monitor means.

10 8. A transmitter according to claim 7, wherein said transmitting means comprises ID code signal storage means for storing the ID code signal, and signal transmitting means for reading out the ID code signal stored in said ID code signal storage means and
15 transmitting the readout ID code signal together with the biological signal in the form of a radio signal to said monitor means.

9. A transmitter according to claim 7, wherein the radio signals transmitted from said transmitting means
20 are electromagnetic induction radio signals.

10. A transmitter according to claim 7, wherein said biological signal transmitter is a portable device.

11. A transmitter according to claim 7, wherein the biological signal includes a pulse rate signal generated
25 by a human body.

12. A monitor system comprising:

a plurality of biological signal detecting means,

to be put on a plurality of human bodies, for individually detecting biological signals generated by the human bodies;

5 a plurality of first transmitting means each for transmitting the biological signal detected by a corresponding one of said biological signal detecting means;

10 a plurality of second transmitting means each for receiving the biological signal transmitted from a corresponding one of said first transmitting means, determining whether a value of the received biological signal is an abnormal value, and if an abnormality is detected, transmitting the biological signal having the abnormality together with an ID code signal predetermined in correspondence with the received biological
15 signal in the form of a radio signal; and

monitor means for receiving the radio signals transmitted from said plurality of second transmitting means and monitoring pieces of biological information
20 corresponding to the biological signals transmitted in the form of radio signals in a one-to-one correspondence with the ID code signals.

13. A system according to claim 12, wherein each of said plurality of second transmitting means comprises
25 receiving means for receiving a biological signal transmitted from a corresponding one of said first transmitting means, abnormality determining means for

determining whether a value of the biological signal received by said receiving means is an abnormal value, and radio signal transmitting means for, if an abnormality is detected by said abnormality determining means, transmitting the biological signal having the abnormality together with an ID code signal predetermined in correspondence with the biological signal in the form of a radio signal.

14. A system according to claim 12, wherein each of said plurality of second transmitting means comprises receiving means for receiving a biological signal transmitted from a corresponding one of said first transmitting means, abnormality determining means for determining whether a value of the biological signal received by said receiving means is an abnormal value, and transmitting/alarming means for, if an abnormality is detected by said abnormality determining means, transmitting the biological signal having the abnormality together with an ID code signal predetermined in correspondence with the biological signal in the form of a radio signal, and generating an alarm sound.

15. A system according to claim 12, wherein said monitor means comprises display means capable of visually displaying pieces of biological information corresponding to the biological signals transmitted from said plurality of second transmitting means in a one-to-one correspondence with the ID code signals.

16. A system according to claim 12, wherein the radio signals transmitted from said second transmitting means are electromagnetic induction radio signals.

17. A system according to claim 12, wherein each of
5 said second transmitting means is a portable device.

18. A system according to claim 12, wherein the biological signal generated by each of said plurality of human bodies includes a pulse rate signal generated by a human body.

10 19. A biological signal transmitter, to be put on a human body, for receiving an input biological signal from output means for detecting a biological signal generated by the human body and outputting the detected biological signal, and transmitting the received biological signal in the form of a radio signal to monitor
15 means for monitoring the content of the biological signal, said biological signal transmitter comprising:

receiving means for receiving the input biological signal from said output means;

20 abnormality determining means for determining whether a value of the biological signal received by said receiving means is an abnormal value; and

transmitting means for transmitting, if an abnormality is determined by said abnormality determining
25 means, the biological signal having the abnormality together with an ID code signal predetermined in correspondence with the received biological signal in

the form of a radio signal to said monitor means.

20. A transmitter according to claim 19, wherein
said transmitting means comprises ID code signal storage
means for storing the ID code signal, and signal
5 transmitting means for reading out the ID code signal
stored in said ID code signal storage means and
transmitting the readout ID code signal together with
the biological signal in the form of a radio signal to
said monitor means.

10 21. A transmitter according to claim 19, wherein
the radio signals transmitted from said transmitting
means are electromagnetic induction radio signals.

22. A transmitter according to claim 19, wherein
said biological signal transmitter is a portable device.

15 23. A transmitter according to claim 19, wherein
the biological signal includes a pulse rate signal
generated by a human body.

24. A monitor system comprising:

20 biological signal detecting means to be put on a
human body to sequentially detect biological signals
generated by the human body;

first transmitting means for patterning the biolo-
gical signals, sequentially detected by said biological
signal detecting means, in accordance with a predeter-
25 mined rule and sequentially transmitting the patterned
biological signals in the form of radio signals;

determining means for determining whether the

biological signals sequentially transmitted in the form of radio signals from said transmitting means are biological signals patterned in accordance with the rule;

calculating means for calculating a value of biological information corresponding to the patterned biological signals if said determining means determines that the biological signals sequentially transmitted from said transmitting means are the biological signals patterned in accordance with the rule; and

display means for displaying the value of the biological information calculated by said calculating means.

25. A monitor system comprising:

biological signal detecting means to be put on a human body to sequentially detect biological signals generated by the human body;

first transmitting means for patterning the biological signals, sequentially detected by said biological signal detecting means, in accordance with a predetermined rule and sequentially transmitting the patterned biological signals in the form of radio signals;

determining means for determining whether the biological signals sequentially transmitted in the form of radio signals from said transmitting means are biological signals patterned in accordance with the rule;

calculating means for calculating a value of biological information corresponding to the patterned

biological signals if said determining means determines that the biological signals sequentially transmitted from said transmitting means are the biological signals patterned in accordance with the rule;

5 discriminating means for discriminating whether the value of the biological information calculated by said calculating means falls within a predetermined range; and

10 alarming means for, if said discriminating means discriminates that the value of the biological information calculated by said calculating means falls within the predetermined range, displaying the biological information calculated by said calculating means and if said discriminating means discriminates that the value
15 of the biological information calculated by said calculating means falls outside the predetermined range, generating an alarm sound indicating that the value of the biological information calculated by said calculating means is an abnormal value.

20 26. A monitor system comprising:

biological signal detecting means to be put on a human body to sequentially detect biological signals generated by the human body;

25 radio signal transmitting means for sequentially transmitting the biological signals sequentially detected by said biological signal detecting means in the form of radio signals;

radio signal receiving means for receiving the biological signals sequentially transmitted in the form of radio signals from said radio signal transmitting means;

5 determining means for determining whether the biological signals sequentially received by said radio signal receiving means correspond to the biological signals sequentially detected by said biological signal detecting means;

10 calculating means for calculating a value of biological information corresponding to the received biological signals if said determining means determines that the biological signals sequentially received by said radio signal receiving means correspond to the biological signals sequentially detected by said biological signal detecting means; and

15

display means for displaying the value of the biological information calculated by said calculating means.

20 27. A monitor system comprising;

biological signal detecting means to be put on a human body to sequentially detect biological signals generated by the human body;

radio signal transmitting means for sequentially transmitting the biological signals sequentially detected by said biological signal detecting means in the form of radio signals;

25

radio signal receiving means for receiving the biological signals sequentially transmitted in the form of radio signals from said radio signal transmitting means;

5 determining means for determining whether the biological signals sequentially received by said radio signal receiving means correspond to the biological signals sequentially detected by said biological signal detecting means;

10 calculating means for calculating a value of biological information corresponding to the received biological signals if said determining means determines that the biological signals sequentially received by said radio signal receiving means correspond to the biological
15 cal signals sequentially detected by said biological signal detecting means;

 discriminating means for discriminating whether the value of the biological information calculated by said calculating means falls within a predetermined range;
20 and

 alarming means for, if said discriminating means discriminates that the value of the biological information calculated by said calculating means falls within the predetermined range, displaying the biological
25 information calculated by said calculating means and if said discriminating means discriminates that the value of the biological information calculated by said

calculating means falls outside the predetermined range, generating an alarm sound indicating that the value of the biological information calculated by said calculating means is an abnormal value.

5 28. A biological signal transmitter for sequentially receiving biological signals in the form of radio signals sequentially detected by biological signal detecting means put on a human body to sequentially detect the biological signals generated by the human
10 body, and sequentially transmitting, in the form of radio signals, the biological signals sequentially received in the form of radio signals, said biological signal transmitter comprising:

radio signal receiving means for sequentially
15 receiving the biological signals sequentially detected by said biological signal detecting means in the form of radio signals; and

biological signal transmitting means for converting the biological signals sequentially received in the form
20 of radio signals by said radio signal receiving means into biological signals patterned in accordance with a predetermined rule, and sequentially transmitting the converted biological signals in the form of radio signals.

25 29. A monitor system and biological signal transmitter therefor, substantially as hereinbefore described with reference to the accompanying drawings.

67

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9219019.8

Relevant Technical fields

(i) UK Cl (Edition K) G1N (EAA, ESS)

(ii) Int Cl (Edition 5) A61B

Search Examiner

R S CLARK

Databases (see over)

(i) UK Patent Office

(ii)

Date of Search

Documents considered relevant following a search in respect of claims 1, 7, 12, 19, 24, 25, 28

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X,P	EP 0472411 A1 (TELETRONICS) Lines 33-48 in column 20	7-11, 19-23
X	WO 90/09143 A1 (SEGA LOWITZ) Page 11	7-9
X	US 5036869 A (INHARA) Column 4	7-9
X	US 4958645 A (CADELL ET AL) Lines 31-53 in column 2	7-11
X	US 4854328 A (POLLACK) Lines 1-25 in column 6	1-5, 7-10 12-17, 19-22
X	US 3902478 A (KONOPASEK ET AL) Lines 21-39 column 2, lines 53-65 column 4 and lines 27-30 column 5	1-23

Category	Identity of document and relevant passages	Relevant to claim(s,

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).